

A HIGH RESOLUTION INTEGRATED COMBAT
AND LOGISTICS MODEL
(STAR-LOG)

Donald Glen Kirby



NAVAL POSTGRADUATE SCHOOL

Monterey, California



THESIS

A HIGH RESOLUTION INTEGRATED COMBAT
AND LOGISTICS MODEL
(STAR-LOG)

by.

Donald Glen Kirby

and

Douglas Peter Schultz

March 1980

Thesis Co-Advisors:

J.K. Hartman
S.H. Darry

Approved for public release; distribution unlimited

T196264 T196265

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS
BEFORE COMPLETING FORM

1. REPORT NUMBER

2. GOVT ACCESSION NO.

3. RECIPIENT'S CATALOG NUMBER

4. TITLE (and Subtitle)

A High Resolution Integrated Combat
and Logistics Model (STAR-LOG)

5. TYPE OF REPORT & PERIOD COVERED

Master's Thesis
March 1980

6. PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s)

Donald Glen Kirby
Douglas Peter Schultz

8. CONTRACT OR GRANT NUMBER(s)

9. PERFORMING ORGANIZATION NAME AND ADDRESS

Naval Postgraduate School
Monterey, California 9394010. PROGRAM ELEMENT, PROJECT, TASK
AREA & WORK UNIT NUMBERS

11. CONTROLLING OFFICE NAME AND ADDRESS

Naval Postgraduate School
Monterey, California 93940

12. REPORT DATE

March 1980

13. NUMBER OF PAGES

109

14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)

15. SECURITY CLASS. (of this report)

Unclassified

15a. DECLASSIFICATION/DOWNGRADING
SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distrubution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Ammunition	Division	STAR
Fuel	Brigade	Combat Simulation
Supply	Army	

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

This thesis presents a design for a simulation of the ammunition and fuel combat service support activities that are an integral function of a U.S. brigade battle. The model expands the existing Simulation of Tactical Alternative Responses (STAR) model to simulate the combat leader's logistical decision logic from the vehicle to the battalion commander and the actions of the support facilities within

#20 - ABSTRACT - CONTINUED

the brigade area. The program design is executed in the Software Design and Documentation Language (SDDL) which produces an output that closely resembles SIMSCRIPT source code in format and structure.

Approved for public release; distribution unlimited

A High Resolution Integrated Combat
and Logistics Model
(STAR-LOG)

by

Donald Glen Kirby
Captain, United States Army
B.S. Jacksonville State University 1969

and

Douglas Peter Schultz
Major, United States Army
B.A. Hofstra University 1968

Submitted in partial fulfillment of the
requirement for the degree of

MASTER OF SCIENCE IN OPERATIONS RESEARCH
(Donald Glen Kirby)

and

MASTER OF SCIENCE IN MANAGEMENT
(Douglas Peter Schultz)

from the

NAVAL POSTGRADUATE SCHOOL
March 1980

ABSTRACT

This thesis presents a design for a simulation of the ammunition and fuel combat service support activities that are an integral function of a U.S. brigade battle. The model expands the existing Simulation of Tactical Alternative Responses (STAR) model to simulate the combat leader's logistical decision logic from the vehicle to the battalion commander and the actions of the support facilities within the brigade area. The program design is executed in the Software Design and Documentation Language (SDDL) which produces an output that closely resembles SIMSCRIPT source code in format and structure.

TABLE OF CONTENTS

I.	INTRODUCTION -----	10
II.	BACKGROUND INFORMATION -----	13
	A. LOGISTICS IN SUPPORT OF A BRIGADE -----	13
	B. OVERVIEW OF SIMSCRIPT AND STAR -----	17
	C. USE OF SDDL IN PROGRAM DESIGN -----	20
III.	EXPLANATION OF THE LOGISTICS MODULE -----	22
	A. INTRODUCTION -----	22
	B. BRIEF DESCRIPTION -----	22
	C. EVENT RS_EVALUATE -----	27
	D. ROUTINE RS_BATTALION_LOGIC -----	33
	E. ROUTINE RS_ALLOCATE -----	39
	F. ROUTINE RS_UPDATE -----	43
	G. EVENT RS_MISSION -----	43
	H. ROUTINES RS_START_MOVE AND LOC -----	43
	I. EVENT RS_CONVOY_ARRIVE -----	44
	J. EVENT RS_OFFLOAD_CACHE -----	46
	K. EVENT RS_CV_ARRIVE -----	46
	L. EVENT RS_ENDLOAD -----	47
	M. ROUTINE RS_FUEL -----	49
	N. EVENT RS_END_FUEL -----	49
	O. ROUTINE RS_END_MISSION -----	50
	P. ROUTINE RS_TRUCK_UPDATE -----	50
	Q. EVENT RS_TRAINS_ARRIVE -----	51
	R. EVENT RS_ATP_ARRIVE -----	52
	S. EVENT RS_ATP_LEAVE -----	54

T.	EVENT RS_ASP_RETURN -----	54
U.	EVENT RS_POL_ARRIVE -----	54
V.	EVENT RS_POL_LEAVE -----	56
W.	EVENT RS_TANKER_RETURN -----	57
X.	EVENT RS_CSA_CONVOY -----	58
IV.	FUTURE ENHANCEMENTS -----	59
APPENDIX A:	SDDL OUTPUT -----	63
APPENDIX B:	SUPPRESSION LOGIC -----	100
BIBLIOGRAPHY	-----	103
INITIAL DISTRIBUTION LIST	-----	105

LIST OF FIGURES

Figure 1 - Diagram of the Ammunition and Fuel Support	
Structure -----	14
Figure 2 - Flowchart of Events and Routines -----	23
Figure 3 - I.O.N. Intervals -----	29

LIST OF TABLES

Table I	- Vehicle L.O.N. -----	29
Table II	- Platoon L.O.N. -----	30
Table III	- Company L.O.N. -----	31
Table IV	- Company Team L.O.N. -----	32
Table V	- Suppression Index Example -----	38
Table VI	- SDDL Keywords -----	63

ACKNOWLEDGEMENT

We would like to express our appreciation to Mr. Robert T. Campbell of C.A.C.I. Inc. for providing the Software Design and Documentation Language program.

I. INTRODUCTION

It is predicted that future warfare will be intense and extremely destructive. In this environment, combat units may have to operate in essentially continuous combat for sustained periods of time. Survival will depend more than ever on firepower and mobility. Due to the high consumption of ammunition and fuel predicted for this type of warfare, the ability to resupply the combat unit may well become a critical factor in the outcome of the war.

This thesis is an attempt to modify the current brigade level Simulation of Tactical Alternative Responses (STAR) combined arms model [Ref. 17] to portray the ammunition and fuel resupply process as an integral part of the brigade battle. This expanded model will allow the analysis of the direct interactions of logistics and combat at a high level of resolution.

The philosophy in developing this document has been to make the methodology as broad and as transparent as possible. The model design is offered for initial use by the analytical community as a possible means of evaluations intra-battalion assets, organizations and operations. Areas of specific investigation could include the practicality of an armored forward area rearm/refuel vehicle, the feasibility of various resupply tactics or the location of critical supply points.

The model is also expected to provide an interface between logistics and combat models. The ammunition supply

point (ASP) has been modeled in detail by the Ammunition Supply Point Requirements and Evaluation Model (ASPREM) and work continues on modeling other areas of the ammunition and fuel supply system. Combat models are used extensively in the cost and operational effectiveness analysis performed for items of proposed or modified hardware such as the advances attack helicopter, the XM-1 tank and the infantry fighting vehicle (IFV). With this model it would be possible to access concurrently the combat and logistical effectiveness of a unit due to changes in tactics or weapons systems. For example, it could determine if the ASP could provide timely ammunition support of a new weapons system in the context of a combined arms battle.

The STAR model is well suited for the addition of the logistics module because, as a discrete event simulation, it has the degree of resolution necessary to model the shooter/supplier interface. It is an active combat simulation large enough to model the major systems of a BLUE brigade including the logistics. The simulated terrain currently consists of a forty by sixty kilometer section of the Fifth U.S. Corps in Europe. This area is large enough to accurately depict the array of combat and logistics units in a brigade area. As a result of being in the same area with the combat units, the logistical units are vulnerable to the effects of air, artillery and direct fire weapons. The model is also extremely flexible due to its ability to vary, through user input, combat tactics, unit composition and vehicle characteristics.

When the research began, it was believed that the primary effort would be to model the ASP, the ammunition transfer point (ATP) and the petroleum, oil and lubricant (POL) point in the brigade support area (BSA). Although these facilities needed to be included in the model, they turned out not to be the primary problems. It was soon determined that the most important problem to be resolved was how to model the combat commanders decision logic concerning the requisition and allocation of ammunition and fuel in a combat situation. To do this required that the logistics module be fully integrated into the combat model.

Chapter II provides a general explanation of the logistical process incorporated into STAR, the programming language used in STAR and the utilization of the Software Design and Documentation Language (SDDL).

Chapter III discusses in detail the logic modelled in each part of the logistics module. The routines and events which make up the logistics module are listed in Appendix A using the SDDL format.

II. BACKGROUND INFORMATION

A. LOGISTICS SUPPORT OF A BRIGADE

The resupply of fuel and ammunition is a complex process directly involving elements of the battalion, brigade, division or corps. All these organizations focus toward the combat battalions. Before outlining the resupply process, it is best to look at the basic element of the entire process, the battalion support platoon.

The typical support platoon is organized with three sections: platoon headquarters, ammunition/transportation section and fuel section. The fuel section is composed exclusively of tactical fuel trucks. All the battalion's fuel is stored in these trucks. The actual number and design of the individual vehicles may vary from unit to unit. The ammunition/transportation section is normally composed of standard tactical cargo trucks. The dual title is used to indicate that the section may have missions other than hauling ammunition. It is the general mission of the support platoon to carry the battalion's basic load, resupply the combat user from this stock and replenish the basic load at brigade, division and corps issue points.

The infrastructure shown in figure 1 delivers, stores and issues resources above the support platoon level. It is best examined when separated into fuel and ammunition. The division support command (DISCOM) provides a bulk petroleum, oil and lubricant (POL) issue point for each

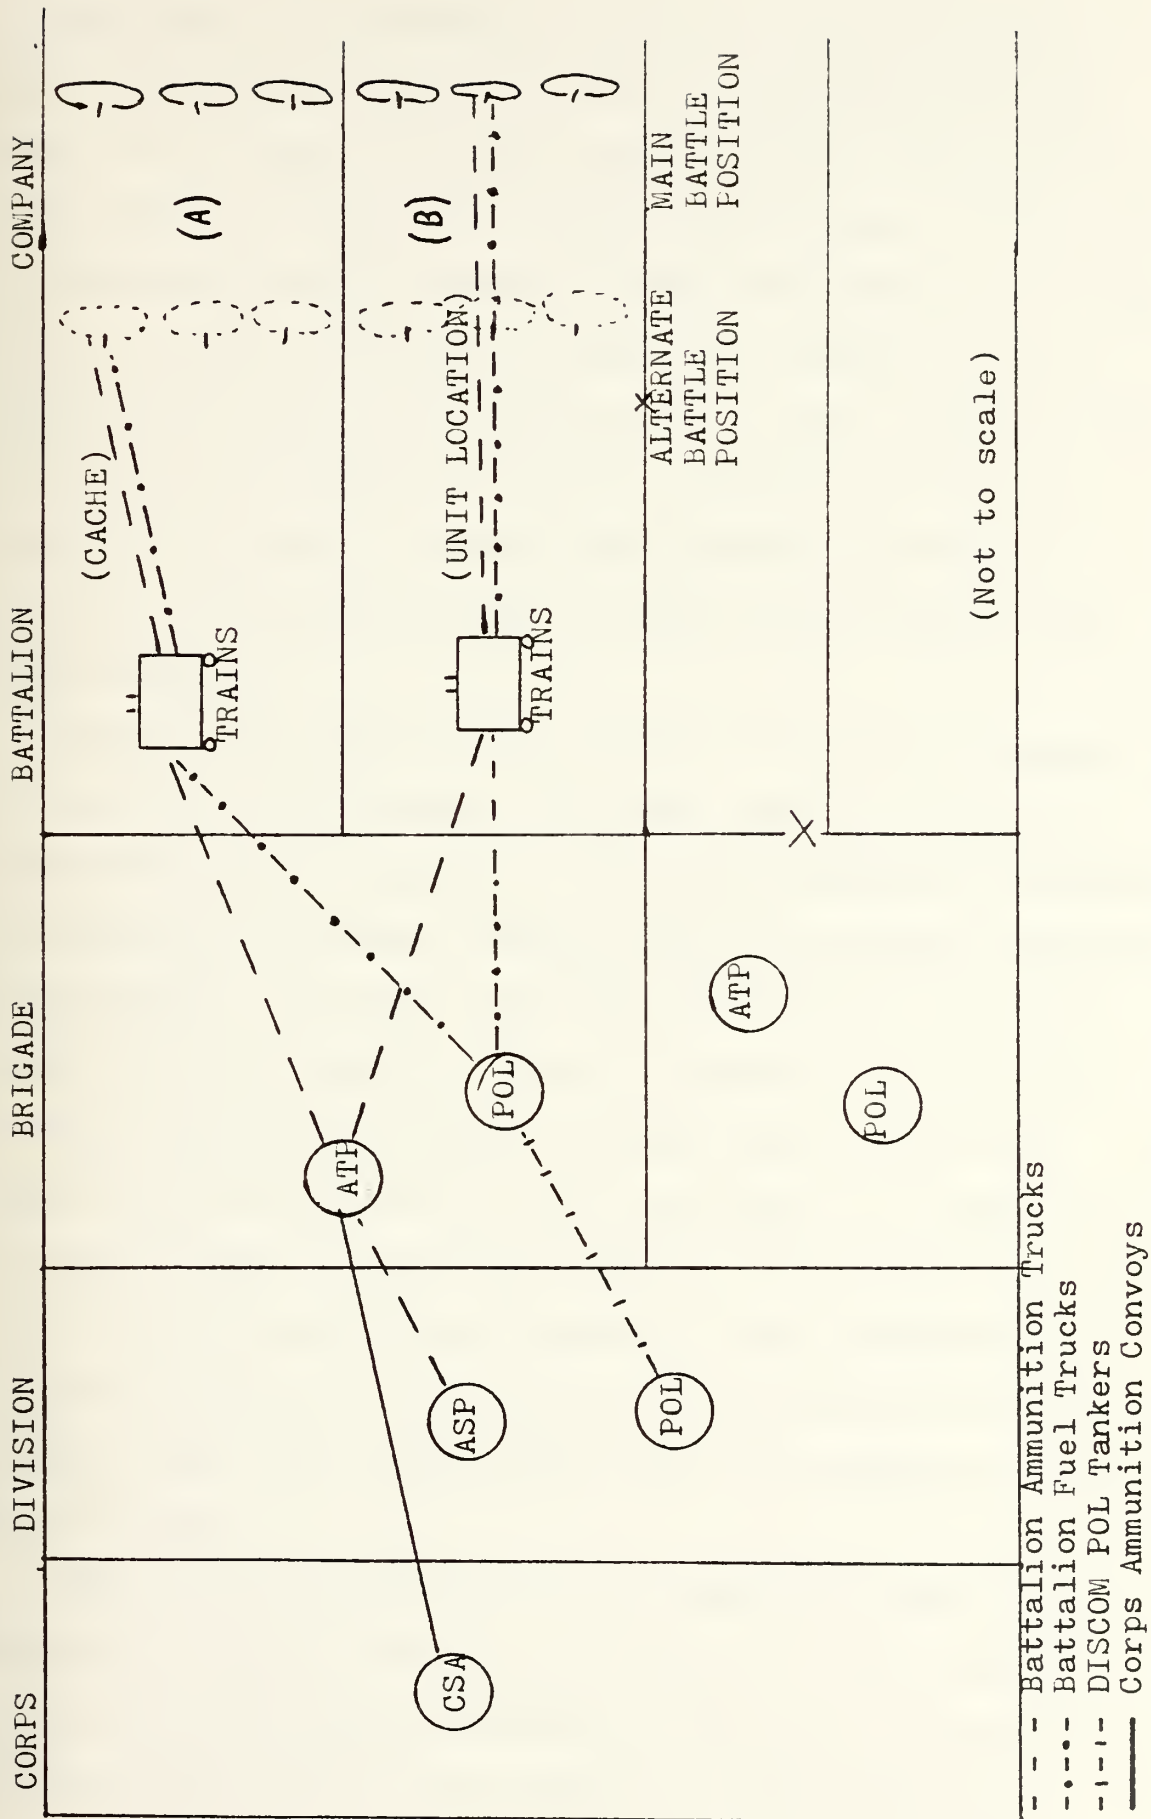


Figure 1 Diagram of the Ammunition and Fuel Support Structure

brigade area by positioning organic POL tankers forward. This POL point is usually located in the brigade support area, out of range of threat medium artillery and provides area support for all units in the brigade area. It is usually 100 percent mobile so that it can move frequently to maintain a position to provide forward fuel support for the combat battalions of the brigade and to avoid indirect fire. The brigade POL point is normally composed of line haul tankers which have a limited cross country capability. It is tailored to provide support based on anticipated fuel requirements.

When a fuel tanker at the brigade POL point is empty, it returns to the division POL point, which is located in the DISCOM area, to refill. The DISCOM POL point is normally composed of linehaul tankers and ground mounted collapsible bladders. It usually has the capability to store at least one day of supply. Since the majority of the bulk storage capability is ground mounted, the division POL point is not mobile and is very vulnerable to a wide range of enemy weapons. For these reasons, it is located to the rear of the division area to preclude small movements in the line of contact from dictating a relocation due to increased risk. The division POL point is resupplied in turn by the corps.

The ammunition system is more complex and none of the ammunition supply facilities are organic to the division. As the Army is organized today, the trucks of the support platoon would have to drive back to a corps ammunition

supply point (ASP) located in the vicinity of the division rear. An ASP is a large non-mobile supply point operated by a corps ammunition company. All the stocks of an ASP are stored on the ground. Doctrinally, one ASP is normally considered to support a division and is expected to have enough ammunition on hand for three to five days of support to the division.

In an effort to streamline the ammunition process, emerging doctrine calls for the establishment of three or four ammunition transfer points (ATP) within the division. Assets for the ATP's will be organic to DISCOM and one ATP will normally be assigned to support each committed brigade of the division. The ATP is composed of forklifts and cranes to transfer ammunition from corps linehaul trucks to the battalion ammunition trucks of the support platoons. Only a limited choice of high volume critical munitions, such as tank main gun, anti-tank missile and 155 mm artillery will be available at the ATP. The ATP is mobile and is completely dependent on the timely and frequent arrival of convoys from the corps ammunition storage areas (CSA) if it is to be able to fulfill its mission. In order to draw munitions not supplied by the ATP, or when the ATP has no munitions, support platoon trucks will be required to travel to the ASP.

Figure 1 illustrates the support structure of two brigades down to the company level. In figure 1, Companies A and B reflect two possible methods of supply. At A Company the resupply action does not deliver resources directly to

the company, but rather caches, i.e., prestocks them at an alternate battle position. Conversely at B Company's position, the fuel and ammunition are delivered directly to the unit location. Notice that if the support platoon vehicles only have to travel to the brigade support area (BSA), the trip is considerably shorter than if vehicles are required to go to the ASP or the DISCOM POL point. Additionally corps transportation assets are used to move munitions forward to the ASP and ATP; while DISCOM assets move POL forward to the brigade POL point.

The past several paragraphs have outlined the resupply process. The logical decision structure for this process is presented in the bulk of this thesis. Before presenting the resupply logic, three specific areas remain to be discussed. These areas are: the STAR combat model, SIMSCRIPT II.5 and the Software Design and Documentation Language (SDDL).

B. OVERVIEW OF SIMSCRIPT AND STAR

As stated earlier the purpose of this thesis is to expand the current brigade STAR model to portray selected BLUE logistics functions as an integral part of the combat process. To understand the design of the logistics module, a basic understanding of the STAR combat methodology and capabilities is required. STAR is written in SIMSCRIPT II.5, a language which was designed specifically for discrete event simulations. As a result, SIMSCRIPT handles many of the bookkeeping tasks such as managing queues,

keeping track of simulated time and managing arrays.

Additionally the code is extremely readable.

SIMSCRIPT is based on the concepts of entities, attributes and sets. Entities are equivalent to elements or physical things. STAR uses entities to represent weapons systems such as tanks or anti-tank missile launchers. In the logistics module, ammunition and fuel trucks would be entities.

Attributes represent characteristics or status of entities. Attributes may be used to differentiate between entities or to indicate if an entity is alive or dead. Other examples of attributes could be vehicle speed, weapon range or vehicle dimensions. The logistics module will use attributes such as vehicle load capacity, the number of gallons of a fuel type on hand, or the number of tank rounds in the ATP.

Another very useful feature of SIMSCRIPT is the concept of sets. Sets are groupings of entities. As the language is written, only entities may belong to sets. A set may be established to contain the members of a specific tank company and thus sets may be used to represent military units. A specific application in the logistics module is to place all the resupply trucks going to a specific company in a set called a convoy.

The basic STAR model consists of a direct fire ground model with artillery and air/air defense modules. It simulates terrain, target detection/selection, damage assessment

and movement. It is capable of portraying a BLUE brigade opposing a RED division.

The integration of the ammunition and fuel resupply processes into STAR will utilize many of the existing routines.

The simulated terrain can portray any area desired by the user. The terrain is derived from map data of the area selected by the user. Because the terrain model depicts actual geographical features, the supply routes can be plotted on the existing roads. The terrain model also allows for the realistic placement of the supply facilities to provide for cover, concealment and accessibility.

The movement routines will allow for the movement of resupply vehicles over preselected routes as a function of terrain and the vehicles' mobility attributes (i.e., accelerations, limiting speed, etc.).

The target detection/selection routines will permit resupply vehicles to be detected and selected as targets by RED combat vehicles, aircraft and artillery. Detection is a function of line of sight, range, target exposure, and yields a time to detect. Selection is a function of range and target priority.

The damage assessment routines determine if the resupply vehicle was hit and, if hit, how much damage was caused.

The suppression module will be used to determine the proximity and density of hostile fire as a basis for making decisions about terminating resupply actions and moving resupply vehicles.

C. USE OF SDDL IN PROGRAM DESIGN

The logistics module was written using Software Design and Documentation Language (SDDL). SDDL is a word processor created specifically for the design and documentation of structured programs [Ref. 12]. This approach was chosen over traditional flowcharting because it provides a readable description of the program logic in a structure closely resembling actual program format. This was possible because the SDDL syntax uses keywords to invoke design structures. The design structures consist of modules which can be defined to be programs, events, routines, etc.; and block designators which can be defined to be control statements such as IF, ELSE, ENDIF or DO. Module invocation keywords can be defined to be CALL, SCHEDULE or PERFORM. Indentation is used to indicate the operational order of the IF and DO statements within each code module. Structure exits and routine invocations are accentuated by arrows. In addition to displaying the structures of each code module, SDDL will provide diagnostic statements whenever substructure errors are detected. For example, if a DO LOOP is not terminated, the output will show an error statement. A feature of SDDL that is of particular benefit to the designer of programs with numerous routines is the summary information that is provided. The summary of information provides a table of contents, a module reference tree, and a module cross reference listing. The table of contents lists the page

number for each module and summary listing. The module reference tree presents the modules in the order called within the program; while the module cross reference listing enumerates the locations where each module is called. Additional cross reference listings are available by marking selected words, titles, phrases or variable names. The many features and flexibility of SDDL allowed the logistics module to be designed and documented concurrently while providing an effective guide for future programming.

III. DETAILED EXPLANATION OF THE LOGISTICS MODULE

A. INTRODUCTION

This chapter contains a detailed description of the proposed logistics module. Each routine and event is discussed in an attempt to document the simplifying assumptions and the reasons for selecting a specific methodology. Figure 2 shows a flowchart of the events and routines presented in Appendix A. A brief description of the events and routines is given in the next section and a detailed discussion of each event and routine makes up the remainder of the chapter.

B. BRIEF DESCRIPTION

Event RS_EVALUATE assigns each combat vehicle a level of need (L.O.N.) based on the ammunition and fuel used.

Routine RS_BATTALION_LOGIC determines within each battalion the order in which each company should be resupplied based on L.O.N., supply status and the selected resupply tactic.

Routine RS_ALLOCATE allocates ammunition and fuel assets to the company being considered based on availability and the efficient utilization of transportation.

Routine RS_UPDATE is called by RS_ALLOCATE for a specific ammunition/fuel type. It transfers trucks and stocks from the trains to the convoy being formed for the company.

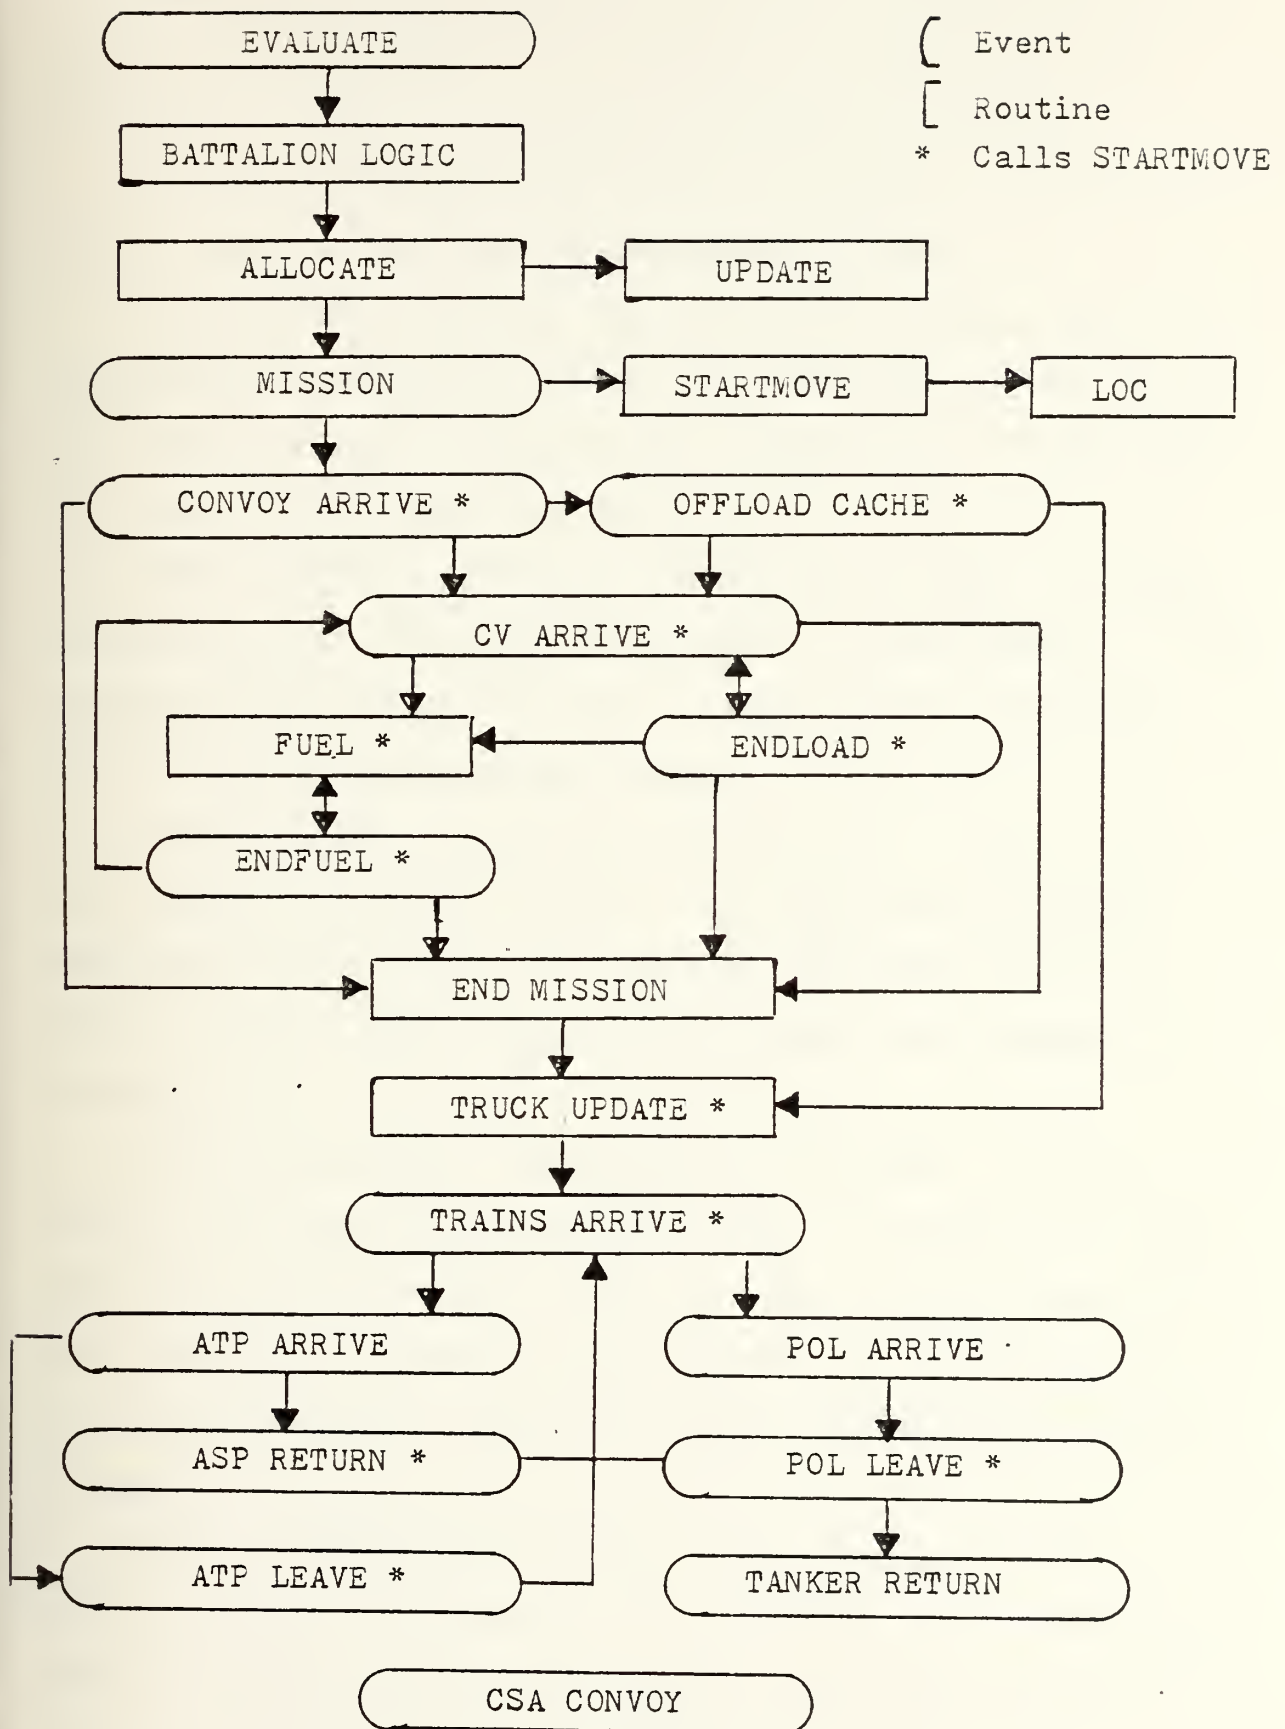


Figure 2 Flowchart of Events and Routines

Event RS_MISSION is scheduled by RS_ALLOCATE for each convoy in a user input time lag that simulates the time required to process a request and assemble a convoy.

Routine RS_START_MOVE is called whenever a vehicle or convoy needs to be moved on the terrain model.

Routine LOC is part of the STAR ground combat model and is a primary interface between the logistical process and the combat process. It moves all vehicles from their start positions to their destination.

Event RS_CONVOY_ARRIVE is scheduled for each convoy and determines when the convoy has reached its destination. Depending on the resupply tactic, it then starts to build a "cache" or to resupply the company.

Event RS_OFFLOAD_CACHE is scheduled for a convoy when the resupply tactic is "cache." It completes the "cache" and starts moving the convoy back to the battalion trains area. If the company is at this location its resupply is started.

Event RS_CV_ARRIVE is scheduled for combat vehicles which need a specific ammunition type. It determines when the combat vehicles have arrived at their destination (battle position or company resupply area). If the location is the company resupply area, it starts rearming/refueling the company.

Event RS_ENDLOAD is scheduled for a combat vehicle. Upon completion of rearming, it starts the refueling process for the current vehicle and calls a like combat vehicle to

move to the company resupply area. It checks for the completion of the mission.

Routine RS_FUEL is called for a vehicle needing a specific fuel type. If a refuel point is idle, the vehicle starts refueling otherwise the vehicle is placed in a queue.

Event RS_END_FUEL is scheduled for a combat vehicle. It completes the refueling process and moves the combat vehicle back to its battle position. If another combat vehicle is waiting in the queue for this fuel type, the event will start the refuel process for it. Event RS_END_FUEL checks for the completion of the mission.

Routine RS_END_MISSION is called whenever a resupply mission has been terminated and is used to indicate that the company supply status has changed.

Routine RS_TRUCK_UPDATE is called for convoy/cache trucks to adjust the amount of ammunition/fuel on each truck prior to their move back to the battalion trains area.

Event RS_TRAINS_ARRIVE is scheduled for all convoy/trucks returning to the battalion trains area. It consolidates the ammunition/fuel left on the trucks returning from a resupply mission to the smallest number of trucks. Based on a user input threshold of partial loads, this event sends trucks to the ATP or brigade POL point for replenishment. For trucks returning from the ATP, ASP, or POL point it adds the truck to the battalion trains.

Event RS_ATP_ARRIVE is scheduled for every battalion ammunition truck sent to the ATP. If the ATP is too busy or in a stockout position for the ammunition type needed, it

sends the truck to the ASP. If the truck remains at the ATP, the event starts the reload process or has the truck wait in a queue.

Event RS_ATP_LEAVE is scheduled for every battalion ammunition truck reloaded at the ATP. It completes the reload process and sends the truck back to the battalion trains area. It continues the reload process for any trucks waiting in the queue for the same ammunition type.

Event RS_ASP_RETURN is scheduled for all battalion ammunition trucks sent to the ASP. It accounts for the time it would take for a truck to make a round trip from the ATP to the ASP. It then sends the truck back to the battalion trains area.

Event RS_POL_ARRIVE is scheduled for every battalion fuel truck sent to the brigade POL point. When the truck arrives, the event starts the refill process or has the truck wait in a queue for that fuel type.

Event RS_POL_LEAVE is scheduled for every battalion fuel truck refueled at the brigade POL point. It completes the refill process and sends the truck back to the battalion trains area. If a POL point tanker has been emptied, it schedules RS_TANKER_RETURN.

Event RS_TANKER_RETURN is scheduled for all empty DISCOM POL tankers at the brigade POL point to account for the time it would take to make a round trip to the DISCOM POL point.

Event RS_CSA_CONVOY is scheduled periodically to simulate the arrival of corps ammunition convoys at the ATP.

C. EVENT RS_EVALUATE

The first portion of the STAR resupply model is called RS_EVALUATE. The purpose of the routine is to evaluate the fuel and ammunition status of the vehicles, crew served weapons, platoons, and companies as portrayed in the model. The SDDL code section imitates the logical process of each vehicle commander periodically taking stock of his level of need (L.O.N.) for ammunition and fuel. If necessary, the vehicle commander passes his L.O.N. information to the platoon leader. The platoon leader in turn evaluates the L.O.N. of his platoon and, if necessary, informs the company commander of the platoon's L.O.N.. The company commander determines the L.O.N. of the company based on the aggregate status of his platoons. Having determined the company L.O.N., the commander then passes his supply request to the battalion headquarters for action. For modeling this process it is necessary to have a quantitative measure for defining/determining the L.O.N. of company members and companies. The term level of need (L.O.N.) is a subjective descriptor of the goodness or badness of resources (fuel and ammunition) and must imply a sense of urgency or priority. While this may sound like an awkward concept, it is in fact, representative of real life situations ranging from - "gee, it would be nice to top off now" to "if we don't get more ammo, we will be out in 15 minutes."

In order to convey the information described above, the level of need (L.O.N.) concept was used. The levels are separated into four categories: full (F), want (W), approaching critical (AC), and critical (C). The levels of need are defined as follows:

1. "Full" (F) - The vehicle or unit is at 100 percent of stowed load/fuel capacity or so close to 100 percent that it will not request resupply action.

2. "Want" (W) - The vehicle or unit is not at "full" stowed load status, but is not in such a position where potential mission accomplishment is jeopardized. The "want" level will initiate a resupply request, but at the lowest priority.

3. "Approaching Critical" (AC) - This level is meant to imply that the supply status reduces the mission potential of a vehicle or unit. "Approaching critical" status initiates a resupply request of higher priority than the "want" level.

4. "Critical" (C) - The stowed load of the vehicle/unit is at a level such that the survival of the entity or its mission accomplishment is immediately threatened by a lack of resources.

For individual vehicles or systems, the L.O.N. thresholds are user input percentages of the amount of fuel/ammunition remaining. Figure 3 represents the thresholds used in constructing the column in Table I for determining the fuel L.O.N. for a tank. Any tank with less than 30% of

its fuel remaining would be considered "critical." If the fuel remaining was greater than or equal to 65% but less than 80%, the tank would be considered "want." The threshold values for each weapon system are model inputs determined by the user.

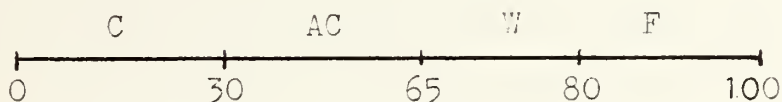


Figure 3 L.C.N. Intervals

TABLE I VEHICLE L.O.N.

VEHICLE	TANK		IFV		CFV		ITV	
L.O.N.	AMMO	FUEL	AMMO	FUEL	AMMO	FUEL	AMMO	FUEL
C	30	25	50	50	65	50	45	50
AC	65	50	70	70	75	75	60	75
W	80	90	90	85	95	83	85	82
F	100	100	100	100	100	100	100	100

In the model, once the type vehicle has been determined, the percentage of ammunition remaining is calculated and a table is searched for the appropriate L.O.N. which is then assigned to the vehicle (See Table I). For example, if a tank has 26 rounds remaining ($26/40 = 65$ percent), the L.O.N. is W. Next, the percentage of fuel remaining is calculated and the table is again searched for an L.O.N. For a tank with 182 gallons remaining, ($182/508 = 36$ percent) the L.O.N. would be (AC). Once the second L.O.N. is

calculated, it is compared with the first and the worse of the two L.O.N.'s is assigned to the vehicle. Thus a tank with 26 rounds and 182 gallons remaining has an L.O.N. of AC.

As each vehicle L.O.N. is updated, the number of rounds expended by type is accumulated as a platoon and company attribute. This identical process is completed concurrently for fuel.

The model will determine a platoon L.O.N. for each type of platoon by entering the appropriate table (See Table II) with the number of platoon members alive and the cumulative distribution of their L.O.N.'s.

TABLE II PLATOON L.O.N.

PLATOON		NUMBER OF VEHICLES ALIVE					
L.O.N.		0	1	2	3	4	5
C	No. C	0	1	1	2	2	3
AC	No. AC+C	0	1	1	2	2	3
W	No. W+AC+C	0	1	1	2	3	4
F	No. F+W+AC+C	0	1	2	3	4	5

A platoon with four (4) XM-1's alive would be "critical" if two or more tanks were "critical." If this condition is not met, the platoon would be "approaching critical" if the total number of C and AC tanks is greater than or equal to two (2). For the platoon to be classified as "want," the conditions for "critical" and "approaching critical" must not be satisfied and the sum of the C, AC and W vehicles

must be greater than or equal to three (3). The numbers used to fill out the tables are user input and may vary for each type of platoon.

The process of developing a company L.O.N. is similar to the platoon method. An aggregation of the platoon L.O.N.'s is used to determine the company L.O.N. The major area of concern for the company L.O.N. is whether or not the platoon organization is homogeneous. If all the platoons are tank or mechanized infantry (INF(M)), the user need only designate his priorities as in Table III. However, if the company is organized as a company team, the user must decide to either accept a homogeneity assumption for supply or designate a table of combinations for the team L.O.N.

TABLE III COMPANY L.O.N.

COMPANY L.O.N.		NUMBER OF PLATOONS ALIVE					
		0	1	2	3	4	5
C	No. C	0	1	1	1	2	2
AC	No. AC+C	0	1	1	1	2	3
W	No. W+AC+C	0	1	1	2	3	4
F	No. F+W+AC+C	0	1	2	2	4	5

The use of a company team L.O.N. table may be required because of differences in the stowed load capabilities of various weapons systems. For example, the infantry fighting vehicle has a stowed load of seven (7) TOW missiles compared to 55 rounds of 105 mm maingun ammunition for an

XM-1 tank. Table IV gives an example of L.O.N. categories for a company team composed of two tank and two mechanized infantry platoons. This team would be "critical" if one or more infantry (M) platoons are "critical" or two or more tank platoons are "critical." The team will be "approaching critical" if one or more infantry (M) platoons are AC or the sum of the C and AC tank platoons is greater than or equal to two (2). For a team to be "want," the sum of the A, AC and W platoons must be greater than or equal to three (3) while the conditions for C and AC are not satisfied.

TABLE IV COMPANY TEAM L.O.N. (2 Inf (M) & 2 Tank)

TEAM L.O.N.	PLATOON STATUS			
		INF (M)	TANK	INF+TANK
C	C	1	2	2
AC	C+AC	1	2	2
W	C+AC+W			3
F	C+AC+W+F			4

As the L.O.N. of each company is determined, RS_EVALUATE will check to see if the company should be considered for resupply. The company will be considered under two possible conditions: if a company is "critical" or if the company does not have a supply mission enroute.

D. RS_BATTALION_LOGIC

Routine RS_BATTALION_LOGIC simulates the battalion commander's thought process wherein he decides which companies should be resupplied and which companies can be resupplied. This decision process is a combination of many inputs which have been reduced to the following:

1. The method of resupply chosen (cache or on position).
2. The urgency of the requesting unit as portrayed by L.O.N.
3. The tactical situation of the company portrayed by the suppression index.
4. The assets available to the commander. The allocation of assets is expanded in event RS_ALLOCATE.

From event RS_EVALUATE, the battalion commander has a list of his companies with their L.O.N. category and resource requirements. He takes this list and continues the prioritization using the second and third items as numbered above.

Before the routine can imitate this thought process, it is necessary to input the method of supply for each company. The user is limited to two (2) methods, "cache" or "unit location." The "cache" method entails sending resupply vehicles forward to some specified position, unloading the resources and returning to the battalion trains. At some time in the future, the company will move to this position. Within the model, the convention will be to always pick

some succeeding battle position as the "cache" site. This method maximizes the use of ammunition supply assets by enabling constant utilization of the ammunition trucks.

There is, however, a problem in caching fuel. In order to include fuel, the support platoon would have to either deposit 55 gallon drums and/or bladders (100 or 500 gallon) or leave fuel vehicles at the "cache" site. In reviewing present and proposed unit organizations [Refs. 5, 6, 7, 8], manuals [Refs. 2, 3, 4] and discussions with other active duty officers, it was determined that the option of leaving drums or bladders should not be included, at least initially. Realistically, the drum/bladder cache is not infeasible, but it requires more assets than are currently available (i.e., a cargo truck to haul and pumps to transfer). The problem associated with leaving fuel trucks at a cache site is twofold. First, leaving the trucks at the cache site puts them stationary and well forward of the battalion trains with a greater probability of detection and engagement. Secondly, leaving the trucks at the cache site essentially takes those trucks out of service until the company comes back to that position and refuels. As ground combat occurs in reality, there is no method to determine how long fuel trucks might be expected to sit at a "cache" site. For these reasons, routine RS_BATTALION_LOGIC will only "cache" fuel when the requesting company is "critical." The "cache" method used for fuel will be to leave fuel trucks at the "cache" location.

At this point, there may be some confusion as to who picks the method of supply discussed in routine RS_BATTALION_LOGIC. Communications among the various battalion elements would normally decide the "how to do it" (i.e., method) either by standard operating procedure (SOP), battalion commander's direction, etc. However, within this routine, the method of resupply is necessarily a user input. The method would be carried as an attribute of each company for model accounting purposes. As currently planned, the method of supply attribute can not be changed as the simulation progresses, but such a change is considered feasible in a future revision.

The "unit location" method of supply is best described in the generally accepted term of unit distribution. The required resources are delivered directly to the unit's general location while the unit is there. Then, the transfer process takes place by having unit and logistical vehicles park next to each other while resources are transferred manually or mechanically. The "unit location" method minimizes the time that the combat unit must spend in resupply activities because the resources do not have to be picked up from the ground. There are also more people available to assist the resupply, (i.e., crews from the resupply vehicles).

As previously described, the RS_EVALUATE event creates a priority ordered list of supply requests for each battalion. The next consideration is how a battalion commander further prioritizes a request when there is more than one company in

any one L.O.N. category. Normally, the commander would make some subjective decisions. The possible criteria for tie breaking are as many and varied as commanders and tactical situations. For this routine, three possible criteria were considered.

1. The importance of the unit as regards to key terrain and assumed enemy objectives.

2. The ability of the unit to bring combat power into the battle.

3. The resource status of the unit as regards to its ability to fight and survive as a unit.

Case one is a user determined priority; in case of a tie between A Company and B Company, priority goes to A Company. Case two would break ties in favor of the unit with the greatest number of weapons systems alive. This assumes that bigger is better and larger units would have more combat power. Case three breaks ties in favor of the unit with the smallest number alive. This case is premised on keeping a maneuver unit supplied to prevent, where possible, degradation of the unit due to lack of resources. There is an implicit assumption that to fight and survive, a smaller unit must fire more rounds per system than a like unit with more systems available. The criteria chosen for the model was case two, the greatest number of weapons systems alive.

As part of his mental appraisal of the situation, the battalion commander must decide how much risk he is willing to accept in committing his resupply assets. In actual

combat, this process has many inputs ranging from the number of trucks on hand to the pitch of the company commander's voice on the radio. To model the degree of risk, it is necessary to have some methodology for measuring the intensity of combat. Within the STAR combat model, there is a suppression module that can be used to implement the risk concept. The module is explained in[Ref. 13]. The appropriate pages from[Ref. 13] are included in Appendix B and should be read before proceeding with this chapter. The suppression module is used because it has already been written into the main model. The use of the suppression methodology requires that the resupply model include all the assumptions and constraints of the suppression routine when and if it is used. Using the terminology and notation of Appendix B, the following example is offered:

1. The battalion commander's user input value of a go/no go value for R is 5.
2. The resupply vehicles (trucks) have a suppression susceptibility of 10.
3. The example values of r and d from Annex B are used.
4. The company receives a 152 mm artillery preparation as follows:

TABLE V Suppression Index Example

	1st Plt.	2nd Plt.	3rd Plt.	4th Plt.
r 1	2	2	0	1
r 2	3	4	0	1
r 3	2	1	0	0
r 4	1	0	0	0
R=	5.115	5.46	0	1.95

Averaged over the four platoons in the company, R is 3.13, which is below the abort mission threshold of five (5); therefore, the mission would go. The implementation of the risk methodology will require close coordination with the user and some amount of experimentation to find values of R that equate to subjective risk of the combat arms user.

Using the suppression methodology to determine the risk allows the user to view risk as an essentially continuous variable. This provides a degree of flexibility in that the value of the abort mission threshold can be set low for low risk or high for accepting a higher risk. This methodology is used again at the point where the combat vehicles are loaded and can be expanded to show uses for a time delay factor as discussed in chapter IV.

When a "cache" is requested, the area suppression index is considered to be zero.

The last criteria to be explained is "supply status." The "supply status" is a company attribute that equates to the number of previously scheduled supply missions that have not yet been completed or terminated. The attribute is increased each time a mission is scheduled for the requesting company. The attribute is decreased by one after a mission is successfully executed or otherwise terminated.

Having explained the background and terminology of the routine RS_BATTALION_LOGIC, it is appropriate to discuss the SDDL code on page 2 of Appendix A. The first two if statements in the routine remove any company that is within the full range or that is non-critical with a supply mission enroute. The list of units eligible for resupply is now reduced to "critical" units or other less than critical units that have no supply actions currently scheduled. Next, if the method to be used is "cache," the logic calls directly to the allocate routine because there is no consideration of risk. If there is a risk criteria, the routine checks for the go/no go value and calls routine RS_ALLOCATE if the logic is a go.

E. RS_ALLOCATE

The routine RS_ALLOCATE is a logical continuation of the battalion commander's thought process from the preceding routine, RS_BATTALION_LOGIC. The review process of the battalion logic routine is complete for one unit and an attempt is now made to match assets available with the missions to be executed. For simplicity and feasibility of

this routine, several factors have been eliminated. A primary example of this is the decision not to cross level ammunition stocks on the support platoon trucks. This simplifying assumption removes the parameters of available manpower and the ability of a man to transfer boxes from one truck to another. Currently, this routine only considers tank main gun rounds and TOW missiles. Although this only allows the logistical model to supply major calibers, the degree of resolution and workload are adequate for simulation of the resupply process. A further simplifying assumption is that all loads of fuel and ammunition are homogeneous. It is realized that this is not a totally realistic representation of the supply process, but this prevents the accounting and record keeping steps in the model from becoming prohibitive. The last major simplification step was the total omission of resupply logic for indirect fire weapons. The reason for this was the author's allowable time limits. However, this same logic will have a general application to the supply of indirect fire units and the organic fire support elements of the maneuver battalions.

Within the allocate routine, there are several major decision thresholds that may be set by the user to mimic the battalion thought and allocation process. These values are input as a percentages and establish thresholds for various allocation functions. It is necessary to discuss the analysis motivating the choice of this methodology.

The routine begins by applying the "cache" fuel logic. As discussed previously, unless the company L.O.N. is "critical," no fuel trucks will be sent to the cache site. The next decision that needs to be made is: given that the battalion is still receiving requests for resupply and some materials have already been dispatched to that unit, what more should be sent to the requisitioner? If the unit L.O.N. is not critical and a resupply mission has been sent, take no action until that mission is terminated.

When a unit is "critical," each time a request is received the model will attempt to allocate the amount requested minus the amount already allotted. In reality, there is some point at which the battalion commander may want to say "all right, that company has been allocated what I consider a sufficient amount." To allow for this thought process to be modeled, a user input threshold is required. For example, if a "critical" company has been allocated 75% of its total requirements, it is temporarily removed from the allocation process. This methodology applies only to "critical" units and prevents the allocation logic from passing a user input point of diminishing return.

So far in the allocation process, only the total amount of rounds or gallons requested by the company has been addressed. It is also necessary to have a method for apportioning the basic load vehicles that carry the fuel and ammunition. Once the status of the battalion's stocks has been determined and the material allocations made, the transportation resources are reviewed and parcelled out.

As before, the emphasis is on the "critical" units. If there are none, so much the better. If there is only one, then that unit is allocated whatever is necessary. In the case of multiple critical units, some trucks are reserved for the other critical companies. This allotment prevents one critical unit from receiving all the available assets at the expense of other critical units. When the units are non-critical the L.O.N. priorities and tiebreaking rules described in routine RS_BATTALION_LOGIC still apply. One final decision threshold remains to be discussed: the breakpoint for sending partial loads. The assumptions of this routine prevent overloading and mixing of truckloads, which may result in requiring three trucks to move 2.1 truckloads. This is a plausible requirement in any real situation and requires a model algorithm to simulate a human decision maker. The method adopted is again a user input percentage for each specified L.O.N. The user may decide never to dispatch a truck if only ten percent of the fuel or ammunition on board is required. (This is a variable level set by the user). All the trucks allocated to a company by routine RS_ALLOCATE form a convoy. The allocation process may form a convoy consisting of only one truck.

The past several paragraphs have discussed a number of decision thresholds for allocating resupply assets of the battalion to support the combat arms company. This series of resupply on/off switches is not designed as a way to constrain resupply; rather, to provide a flexible methodology for assessing the impact of the threshold levels.

F. ROUTINE RS_UPDATE

Routine RS_UPDATE is called by RS_ALLOCATE for a specific ammunition/fuel type. It transfers trucks and stocks from the trains to the convoy being formed for the company.

G. EVENT RS_MISSION

This event calls the RS_START_MOVE routine to begin the simulated movement of resupply vehicles. Event RS_ALLOCATE schedules an RS_MISSION for each convoy departing the battalion trains enroute to a company resupply area. The time lag for scheduling an RS_MISSION is a user input that simulates the time required to organize a convoy. The event RS_CONVOY_ARRIVE is also scheduled to determine when and if the resupply convoy arrives at its mission location.

H. ROUTINES RS_START_MOVE AND LOC

Routine RS_START_MOVE is used to set the location attributes of each resupply vehicle to the present location and the location to which the truck is going. RS_START_MOVE also calls routine LOC of the present STAR Combat model. Routine LOC checks the alive or dead status of the vehicle, and, if appropriate, calls routine move of the main STAR movement module. The RS_START_MOVE and LOC routines are a primary interface of the resupply module and the existing STAR air/ground combat model.

I. EVENT RS_CONVOY_ARRIVE

Event RS_CONVOY_ARRIVE is used to monitor the arrival of a resupply convoy at a company resupply area. Once the model detects the arrival of a convoy, the suppression methodology is used to determine the suppression index. The suppression index is compared to a user input called abort mission threshold. The threshold is a value above which the commander does not wish to accept the risk of enemy action. For values above the threshold, the convoy returns to the battalion trains; this is accomplished by calling routine RS_END_MISSION, which is described later in this chapter.

For cases where the mission is not aborted, the routine determines what method of supply was designated for this company and simulates the convoy commander's checking to see if any vehicles were lost enroute. Total resources available in the convoy are then adjusted for losses. The implementation of the supply methods begins in this routine. For the "cache" method, a time to unload pallets onto the ground must be determined. At present, the authors assume that no manpower would be available for this and field expedient techniques must be used. A possible technique used in this case is to remove the tie downs, move the vehicle rapidly in reverse and then brake hard, causing the pallets to fall off by their own momentum. The RS_OFFLOAD_CACHE event is scheduled after a user input time delay to simulate the unloading process.

When the "unit location" method is used, the routine simulates the convoy commander reporting the number/type of rounds/gallons and the number of trucks in his convoy to the unit commander. The unit commander, in turn, instructs his unit to move, two at a time, to each resupply vehicle. The unit combat vehicles move by order of L.O.N. This movement can take place while the company is engaged in a direct fire battle as long as the abort mission threshold of the resupply convoy is not exceeded. The assignment of two combat vehicles per resupply vehicle was chosen for various reasons. Removing one or more platoons for resupply could have disastrous results on the combat capability of the unit. There are three ways to address this problem: don't remove a platoon, remove a platoon regardless of the combat situation or implement additional combat movement decision logic to decide when a platoon could or could not resupply as a unit. After analyzing these alternatives, it was determined that the simplest approach was to resupply by vehicles rather than by platoons. If only one vehicle at a time were to be dispatched to each truck, the potential for unrealistically long resupply times is very great. Two combat vehicles per resupply vehicle is a good choice in that one combat vehicle can be positioned on each side of the resupply vehicle (fuel or ammunition). Although this is a severely cramped working space for ammunition unloading, it is common field practice. For the fuel truck, one or two combat vehicles per truck are used, depending on the pump and hose equipment available.

It is necessary to point out that the movement by L.O.V. could remove all the vehicles of one platoon or from a geographic area of the company battle position to the company resupply area. This is a pertinent area for future enrichment of the model. Also included in this event are several fuel/ammunition attribute accounting adjustments and schedulings of other events. The two most important events scheduled by RS_CONVOY_ARRIVE are the events RS_OFFLOAD_CACHE and RS_CV_ARRIVE. These events are presented in the order mentioned for logical explanation of the mission sequence.

J. EVENT RS_OFFLOAD_CACHE

Scheduling of the RS_OFFLOAD_CACHE event occurs only when the cache method of supply is chosen. This event performs all the accounting associated with placing piles of ammunition on the ground in the company supply area. If fuel is included, the appropriate number of trucks are deleted from the convoy and they remain at the cache site.

If the requesting unit is already present at the resupply area, the cache unloading method is still used and the combat vehicles are scheduled at the ammunition piles by event RS_CV_ARRIVE. Other events and routines are used to move the convoy back to the battalion trains.

K. EVENT RS_CV_ARRIVE

Event RS_CV_ARRIVE is primarily designed to determine if combat vehicles have arrived at the resupply area, check for "cache," simulate the individual vehicle resupply actions

for ammunition and perform the associated model accounting procedures. After checking the area suppression index, the resupply process is started by calculating the rearm time for each combat vehicle present. The attributes for the combat vehicles' stowed load are increased as the resupply trucks' amount on hand attribute is decreased. The event RS_ENDLOAD is scheduled for each combat vehicle in the amount of time it takes to rearm that vehicle. This logic applies, regardless of the method of supply. Within this routine, the only major difference between "cache" and "unit location" is the time differential caused by having to pick rounds up from the ground as opposed to loading from truck bed height. As the vehicles are rearmed, counters are increased to insure that only the actual amount on hand is loaded, no stowed load capacity is exceeded and the number of vehicles rearmed by ammunition type is recorded.

The refuel process may be initiated from this event by calling routine RS_FUEL. RS_FUEL may still be called, even when all ammunition actions are complete. Finally, RS_CV_ARRIVE is scheduled for each vehicle to be rearmed and/or refueled.

L. EVENT RS_ENDLOAD

The completion of the ammunition reloading of a vehicle is simulated by this event. The model assumes that combat vehicles will be rearmed before refueling. This is a simplifying assumption built into this event. There is no explicit queue for vehicles requiring ammunition upload because

the endload event only schedules vehicles to ammunition trucks on a one for one replacement basis. Once a vehicle has been rearmed, it is passed to the RS_FUEL routine for refueling. If there is no ammunition remaining or no further requirements for ammunition, this event, in conjunction with RS_CV_ARRIVE, will continue to call vehicles to the resupply area if they need refueling. This process is described next in routine RS_FUEL and event RS_END_FUEL.

For a resupply mission to be completed, there are various combinations of two basic conditions that must be satisfied. These conditions are the exhaustion of an ammunition/fuel type or the satisfaction of all requirements for an ammunition/fuel type. In order to confirm mission completion, a system of counters is used in this event and in event RS_END_FUEL. Each vehicle arriving at the resupply area has its L.O.N. set to "full" by this event. Setting the vehicle L.O.N. to "full" is part of the process that monitors completion. As the event loops through each ammunition and fuel type, it adds one to the "loop counter" and checks for the conditions mentioned above. For each ammunition and fuel type, if the number of vehicles alive equals the number of vehicles "full," one is added to the "mission counter." One is also added to the "mission counter" if the ammunition or fuel type is exhausted. When the "mission counter" equals the "loop counter" the mission is considered complete and RS_END_MISSION is called to terminate the resupply.

M. ROUTINE RS_FUEL

This routine is scheduled for one vehicle requiring one type of fuel. As discussed previously, all vehicles will eventually be routed to the fuel trucks. Since the arrival rate for fueling is uncontrolled, the fueling routine establishes a first in, first out (FIFO) queue for each type of fuel. The number of fuel service points is determined by the capabilities of the specific fuel trucks organic to the battalion support platoon of the unit now being resupplied. Within this routine, a refuel time is calculated for each vehicle and the appropriate attributes are updated. With the exception of the FIFO queue, this routine is almost an exact duplicate of the RS_CV_ARRIVE event. The duplication is intentional in that refueling and rearming are very similar from the simulation point of view. Event RS_END_FUEL is scheduled for this combat vehicle in the amount of time required to refuel the vehicle.

N. EVENT RS_END_FUEL

After the time to refill a combat vehicle has elapsed, this event sets the appropriate counters for the number of vehicles refueled and then calls the next vehicle from the queue. The same double check mechanism for not excluding any vehicle from rearm/refuel is used here as it was used in the preceding modules for fuel and ammunition. Additionally, RS_END_FUEL repeats the "mission" and "loop counter" logic, already described in RS_ENDLOAD.

O. ROUTINE RS_END_MISSION

Four other events or routines may schedule the RS_END_MISSION event. Although there are many possible schedulers, there are only two basic causes for scheduling this event. The first cause is exceeding the abort mission threshold. This means that the resupply area is receiving enemy fire in sufficient quantities to cancel the ongoing resupply. RS_CONVOY_ARRIVE, RS_CV_ARRIVE and RS_ENDLOAD all check the suppression index and can schedule RS_END_MISSION due to hostile fire. The second possible cause for mission termination is the completion of resupply. As explained in the preceeding events, partial mission completion signals are set and summed to an end of mission counter in RS_ENDLOAD and RS_END_FUEL. Event RS_END_MISSION deletes one from the company supply status attribute defined in RS_MISSION. Deleting one from the supply status is, in effect, simulating the communication of resupply mission termination to the battalion headquarters of the company being resupplied. This is particularly important for non-critical units, which the logic prevents from having more than one resupply mission enroute at a time. RS_END_MISSION also calls the RS_TRUCK_UPDATE routine.

P. ROUTINE RS_TRUCK_UPDATE

There are two primary functions of the RS_TRUCK_UPDATE routine. First, the ammunition/fuel remaining in the convoy at mission termination is distributed uniformly within the convoy; secondly, the convoy movement process is begun.

The distribution of the remaining resources was implemented on the following premise. During a resupply mission, it is assumed that the trucks have been unloaded at a constant rate. Therefore, when the mission is terminated the amount of ammunition/fuel remaining will be uniformly distributed by type over the trucks in the convoy. This is necessary because individual trucks are not portrayed during the unloading process.

After the loads are distributed over the vehicles, routine RS_START_MOVE is called to begin the movement of the convoy back to the trains and Event RS_TRAINS_ARRIVE is scheduled for this convoy.

Q. EVENT RS_TRAINS_ARRIVE

When the convoy returns to the trains, each ammunition and fuel type in the convoy is summed and then reallocated over the trucks for that type in the trains to consolidate the munitions/fuel on the minimum of trucks. Remaining partial truckloads are then calculated. At this point, a user input is required as a decision point for how much of a partial load causes the truck to be retained or sent to the rear for reconstitution of the basic load. This user input value would be expressed as a percentage of maximum capacity for each type load, e.g., if a resupply vehicle has less than 60 tank rounds (50%) on board, send it to the ATP. To accomplish refilling the resupply vehicles, this routine calls RS_START_MOVE and schedules either ATP_ARRIVE or POL_ARRIVE as appropriate. This moves a truck out of the battalion trains.

Only after these vehicles have been dispatched, does any accounting take place. The number of trucks in the trains is updated as is the amount of ammunition/fuel on hand. RS_TRAINS_ARRIVE is also scheduled for trucks returning from the ATP, ASP and POL point. A returning truck is normally full, so no cross leveling would occur. When the resupply vehicle arrives at the trains, its amount of material on hand is added to the battalion total on hand for that type and the number of trucks in the trains is increased by one.

R. EVENT RS_ATP_ARRIVE

Each ammunition vehicle departing the battalion trains for the ATP causes an RS_ATP_ARRIVE to be scheduled. The arrival event simulates the loading process of a battalion ammunition truck; provides an alternate loading site, the ASP, if the ATP is too busy or in a stock out condition; performs the appropriate accounting; then sends the battalion ammunition truck to the appropriate destination, scheduling either the event RS_ATP_LEAVE or RS ASP_RETURN.

The ATP is modeled as a first in, first out queue for each type of ammunition. When an ammunition truck arrives at the ATP, the queue for that type is checked. If the loader is available and sufficient munitions are on hand, the vehicle is loaded. What consists of a sufficient amount of ammunition is input by the user as a specified level of vehicle capacity. This input is used to provide the user with flexibility to accept less than the amount

required or send the truck back to the ASP to get 100 percent of the requirement. This model assumes all munitions are always available at the ASP. At the ATP, the actual amount of munitions to be loaded is used to calculate a loading time and the amount of material transferred is added to and subtracted from the appropriate attributes. The loader is set to busy and event RS_ATP_LEAVE is scheduled in the amount of time just calculated for this truck.

Had there been no ammunition or the user's specified minimum amount not available, the battalion truck would have been scheduled to go to the ASP. In the same vein, if the loader is busy, the estimated time before this truck can complete loading is calculated. The calculation is merely the product of the number of vehicles in the queue and the mean loading time for that type of munition. Reference 9 lists mean loading times for various vehicle, ammunition and loader combinations. These times are determined by field trials. The ASP trip time is determined by the user. This trip time consists of an average ASP loading time plus the travel time from the ATP and then back to the battalion trains. This deterministic input would vary by the scenarios played around the Brigade battle. The option of not waiting at the ATP when the ASP trip time is shorter is realistic and is used to increase the amount of munitions available to the combat battalions over time. A typical mission would see trucks loaded at the ATP and then scheduled out of the ATP by event RS_ATP_LEAVE. Continued operation of the ATP is dependent on the timely and frequent

arrival of corps linehaul cargo trucks at the ATP. When a corps convoy arrives, full linehaul trucks are deposited at the ATP and empty trucks are hauled back to corps ammunition storage areas for reuse. Corps convoys are addressed in event RS_CSA_CONVOY.

S. EVENT RS_ATP_LEAVE

This event is scheduled for a particular battalion re-supply vehicle by the event RS_ATP_ARRIVE. When the vehicle loading time has passed, RS_START_MOVE is called to send that vehicle back to the battalion trains and RS_TRAINS_ARRIVE is scheduled. Since a vehicle has now been loaded and departed the ATP, the server is set to idle. The queue for that ammunition type is checked for another vehicle. If there is a vehicle in the queue, it is brought in for servicing, otherwise the server remains idle. The RS_ATP_LEAVE event is a duplicate of RS_POL_LEAVE.

T. EVENT RS_ASP_RETURN

This event is only scheduled for those trucks that have been sent to the ASP. The major function of the event is to account for the time it would take to move the battalion ammunition truck to the ASP, load, and return to the ATP. The turnaround time is user input.

U. EVENT RS_POL_ARRIVE

This event is scheduled for an individual battalion fuel truck requiring a given fuel type.

A brigade POL point will be set up with a gas station type layout of service lines for the various types of fuel.

As a battalion fuel truck arrives, it enters one of the lines, is refueled and departs. The process is modeled as a first in, first out queue for each fuel type. When a battalion fuel truck arrives, the total number of gallons and DISCOM linehaul tankers available in the POL point for this specific type of fuel are calculated. A user determined number of refueling points is input.

For the sake of simplicity and to minimize the future coding requirements, only the total number of refuel points, gallons and linehaul tankers on hand are considered in aggregate for any fuel type. This precludes the requirement of tracking an individual 5000 gallon linehaul tanker through the POL operation. To keep the desired resolution for this operation, as the number of gallons dispensed equals the amount carried by a linehaul tanker, one tanker is removed from the the POL point.

When a battalion fuel truck arrives, this event first checks for the fuel type of the truck, determines the amount of that fuel available in the POL point and if there is an idle refuel point for that type. When both fuel and a server are available, a check is made to insure that the battalion fuel truck can be completely filled. If 100 percent of the requirement is not available, the truck is added to the queue until there is sufficient fuel for a refill. While at first, this may seem unreasonable, it prevents a truck from going through the queue and receiving some amount less than required and then returned to the battalion trains. It would not be unusual for a support platoon truck

to remain at the POL point until there is enough fuel, simply because there is usually no other source of fuel. The drawback to this methodology is that a DISCOM POL tanker could sit idle with a sizable amount of fuel on hand, while a battalion truck sits waiting for the arrival of the next returning DISCOM tanker to satisfy the total requirement.

In reality, a process like this would be unacceptable because it could idle transportation needlessly. The process of constructing detailed decision rules to optimize all combinations of the fuels, vehicle capacities and load breakpoints was analyzed and found to be overly complicated for the requirements of this model. Additionally, the worst case example given above would only happen when the brigade POL point is about to run out of that type of fuel.

This event also sets refuel points to busy, adds and subtracts the amount of fuel received and issued to the respective quantity attributes, places trucks in the proper queue and calculates the time to refuel a battalion fuel truck. This amount of time is then used to schedule RS_POL_LEAVE for the current truck.

V. EVENT RS_POL_LEAVE

RS_POL_LEAVE is scheduled for an individual battalion fuel truck by RS_POL_ARRIVE. When the loading time has elapsed, RS_START_MOVE is called to send the battalion fuel truck back to its parent battalion. After the truck departs, the total amount of fuel on hand in the POL point

for that type is calculated. This amount is then subtracted from that type capacity of the POL point. The capacity equals the number of linehaul trucks times their maximum capacity for that fuel type. If the difference between the two capacities is greater than or equal to a linehaul truck load, then a linehaul truck of that type is deleted from the number of trucks on hand.

The total turnaround time for a linehaul refill at the DISCOM POL point is input by the user. The event RS_TANKER_RETURN is then scheduled at the turnaround time plus the current time. The calculation of turnaround time is a deterministic function of the distance, vehicle capacity and the average waiting time at the DISCOM POL point. The DISCOM POL point is always assumed to have fuel.

As the logic of the RS_POL_LEAVE event continues, the departing battalion basic load carrier leaves one refuel point not in use. If there is sufficient fuel for another support platoon fuel truck, the queue is checked to bring up the next vehicle and refuel it. If there is no queue, the refuel point is set to idle.

W. EVENT RS_TANKER_RETURN

Each time a DISCOM linehaul tanker is emptied, RS_TANKER_RETURN is scheduled. The time lapse for scheduling has already been discussed in the previous event. When the DISCOM tanker returns to the brigade POL point, the total number of tankers and gallons on hand for that fuel type is increased appropriately.

X. EVENT RS_CSA_CONVOY

The resupply of the ATP by corps linehaul trailers is simulated by this event. The scheduling interval or frequency is a user input value and may be set as a fixed cyclic rate or as a distribution about some mean time. The total ammunition on hand for the ATP is increased by type when the CSA convoy arrives at the ATP.

IV. FUTURE ENHANCEMENTS

The proposed logistics module maps out the basic program structure for integrating the logistical functions of fuel and ammunition resupply into the STAR combat model. Although the logic is complete within the bounds of the constraining assumptions, time precluded the enhancement of several areas.

One area that should be reviewed prior to attempting the transfer of the design to code is the resupply of artillery units. If the desired level of resolution for artillery is compatible with the assumptions limiting one type of ammunition and fuel per weapons systems type, the existing logic structure can be easily adapted to artillery systems support. This is feasible if the one ammunition type for field artillery means a complete round. In terms of the resupply model, it is only relevant that the resupply vehicles deliver complete rounds to the unit and not differentiate between such rounds as high explosive, improved conventional munitions (ICM), family of scatterable mines (FASCAM) and smoke.

An additional resource consumer to be considered is the forward area rearm and refuel point (FARP). The FARP supplies the munitions and fuel necessary to replenish rotary wing aircraft operating forward in the brigade area. As written, the logic of the resupply model is generally applicable to the FARP and can be readily modified once the

appropriate time and motion study data for aircraft rearm/refuel is acquired.

The logistics model currently assumes only one ammunition type per firing system and homogeneous truck loads for ammunition support. If the model is expanded to track more than one ammunition type per system, the current STAR model already has the capability to record the rounds expended. New tables for vehicle L.O.N.'s will have to be constructed to consider a change in status for either ammunition type. The L.O.N. determination for fuel and higher units would then continue as previously outlined in event RS_EVALUATE. The number of ammunition types is not necessarily limited to two and would necessarily vary by weapons systems and units being considered. As a case in point, a mechanized infantry rifle squad with an infantry fighting vehicle might expend TOW, Dragon, Bushmaster and smallarms.

To depict an entity with more than one weapons type, the resupply model should be enriched with a mixed load methodology for ammunition. Research will be required to determine feasible loading ratios for different types of units. A mixed loading methodology would also be required for the battalion trains, ammunition transfer point (ATP) and ammunition supply point (ASP). At the resupply area itself, the current transfer methodology would require revision. A more detailed process for matching combat vehicles with resupply vehicles will have to be constructed. This would include the possibility of combat vehicles moving

between trucks to be loaded with the necessary ammunition types. In view of the level of complexity required to obtain this capability it is not apparent that such an enrichment would be worth the effort.

A more specific problem area is the definition of the company location for resupply. The combat movement decision logic can place elements of one company in tandem on different battle positions. Although there will be resupply areas designated for each company battle position, a specific logic and coding implementation effort will be required to insure that resupply integration will not degrade the present movement decision logic. Associated with this is the possible movement of combat units to an area other than that which was designated for a scheduled resupply. To address this problem some assumptions as to communications with the resupply convoy must be met and decision logic designed to alter the destination of a convoy based on the movement of the designated company. A possible method of solving this problem is to utilize the existing STAR detection and movement modules. Since STAR gives all vehicles the capability of detection, the convoy destination could be changed as a function of where Blue or Red elements are detected by the resupply convoy. A previously input list of alternative resupply areas would then be used to determine a new convoy destination.

The most important area of the supplier/shooter interface remaining to be examined is the impact of resource shortfalls on the combat forces. For example, what happens

as the battle progresses and the tank crews see their stowed load getting smaller and smaller. Will their target engagement criteria change to conserve ammunition? Will the platoon or company tactics change as the leaders realize that the unit ammunition status is dropping lower and lower? Should logic be included for cross-leveling between vehicles in the company? Should the movement decision logic include a breakpoint for fuel/ammunition status? The answers for these questions are required prior to expanding this area and must be resolved with the combat arms. There are many possible tactics that may or may not be employed. It remains a major task to determine a consensus of possible combat reactions to supply shortfalls and to develop algorithms for implementation in the combat movement logic.

As mentioned in chapter III, the STAR suppression module contains a methodology for calculating the duration of suppression times. A possible expansion of the resupply model is a modification of the current application of suppression to resupply. The process envisioned would degrade the transfer rate of resources using the suppression time delay methodology in those cases where the suppression index is less than the abort mission threshold. As an example, this could simulate a resupply in process where the unit comes under attack by mortars, takes cover for a period of time and then resumes the transfer of fuel and ammunition. This enrichment would be particularly useful in the analysis of the forward area rearm/refuel vehicle (AFARV) concept.

APPENDIX A: SDDL Output

The SDDL output presented in this appendix is the proposed structure of the logistics module.

The structure keywords are shown in Table VI.

TABLE VI SDDL KEYWORDS

STRUCTURE	INITIATOR	TERMINATOR	ESCAPE	SUBSTRUCTURE
MODULE	ROUTINE	ENDROUTINE		
	EVENT	ENDEVENT	RETURN	
BLOCK	IF	ENDIF		ELSE
	DO	LOOP	EXITLOOP	

MODULE INVOCATION KEYWORDS	CALL, SCHEDULE
----------------------------	----------------

In the SDDL output, words containing or connected by an asterisk (*) denotes variables that are considered key parameters in the decision logic. Words connected by or containing a percent sign (%) are variables whose values are determined by the user. Note that there are many cases where both a percent sign and an asterisk are present. Additionally, strings of words grouped within single quotation marks (') are considered single variables.

2	4	5	7	8	9	10	11	13	14	16	17	18	19	20	21	22	23	24	25	26	27	28
11	62	90	146	176	187	194	233	233	233	233	233	233	233	233	233	233	233	233	233	233	233	233
EVENT	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE	ROUTINE
RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS	RS
EVALUATE	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION	RS - FATTALION
LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC	LOGIC

MODULE REFERENCE TREE

MODULE - CROSS REFERENCE LISTING

CONTROL VARIABLES - CROSS REFERENCE LISTING

USER INPUTS - CROSS REFERENCE LISTING

LINE		PAGE	3
57	IF ANY COMPANY*SUPPLY*STATUS IS LESS THAN ONE OR ANY COMPANY*LCN IS CRITICAL		
58	CALL RS_BATTALION_LOGIC FOR CURRENT BATTALION----->(4)
59	ENDIF		
60	LCCP		
61	ENDEVENT		

LINE

PAGE

4

```

62 ROUTINE RS_BATTALION LOGIC
63 *****
64 * THIS ROUTINE DETERMINES WITHIN EACH BATTALION, THE ORDER IN WHICH EACH COMPANY
65 * SHOULD BE RESUPPLIED BASED ON LCN, SUPPLY STATUS AND RESUPPLY OR TACTIC. A USER
66 * INPUT SETS A COMPANY RESUPPLY TACTIC FOR EACH COMPANY (CACHE OR UNIT LOCATION)
67 *****
68 DO FOR EACH COMPANY IN THE BATTALION IN ORDER OF COMPANY*LCN THEN BY LARGEST
   NUMBER ALIVE
   IF COMPANY*LCN IS FULL
     <-----EXITLOOP
   ELSE
     <-----IF COMPANY*LCN IS NOT CRITICAL AND COMPANY*SUPPLY*STATUS IS GREATER THAN ONE
     <-----EXITLOOP
   ENDIF
   IF THE COMPANY*RESUPPLY*TACTIC IS CACHE
     IF CALL RS_ALLOCATE FOR THE CURRENT COMPANY----->( 5)
     ELSE
       THE BATTALION COMMANDER DECIDES ON A DEGREE*CF*RTSK* HE IS WILLING TO
       ACCEPT WHEN SENDING RESUPPLY ASSETS TO A COMPANY POSITION
       DETERMINE THE COMPANY*SUPPRESSION*INDEX
       IF COMPANY*SUPPRESSION*INDEX IS LESS THAN THE DEGREE*CF*RTSK*
         CALL RS_ALLOCATE FOR THE CURRENT COMPANY----->( 5)
       ENDIF
     ENDIF
   LCCP
   ENDCRUTINE

```



```

90  RS_ALLOCATE
91  THIS ROUTINE IS CALLED FOR EACH COMPANY IN THE ORDER DESIGNATED BY
92  * RS_BATTALION LOGIC. IT ALLOCATES AMMUNITION AND FUEL ASSETS TO THE COMPANY
93  * BEING CONSIDERED BASED ON AVAILABILITY AND THE EFFICIENT USE OF TRANSPORTATION
94  * IT FORMS A CONVOY FOR THE COMPANY CURRENTLY BEING CONSIDERED.
95  * * * * *
96  CC FOR EACH AMMUNITION OR FUEL TYPE
97  IF THE LOGP IS CN FUEL
98  IF THE COMPANY*RESUPPLY*TACTIC% IS CACHE AND THE COMPANY*LN IS NOT CRITICAL
99  <-----EXITLCCP
100  ENCLIF
101  IF THE COMPANY*LN IS CRITICAL AND THE COMPANY*SUPPLY*STATUS IS GREATER THAN
102  * CN
103  * DETERMINE THE AMMUNITION/FUEL STILL NEEDED (REQUESTED - ALLOCATED)
104  * IF THE AMMUNITION/FUEL STILL NEEDED IS LESS THAN *25% OF THE AMMUNITION/FUEL
105  * REQUESTED.
106  * <-----EXITLCCP
107  * ELSE ADJUST THE AMOUNT REQUESTED TO EQUAL THE AMOUNT STILL NEEDED
108  * ENCLIF
109  * IF THE NUMBER OF CRITICAL COMPANIES IN THE BATTALION IS GREATER THAN ONE
110  * DETERMINE THE NUMBER OF TRUCKS ALIVE
111  * IF THE NUMBER OF TRUCKS ON HAND IS LESS THAN THE NUMBER OF CRITICAL
112  * COMPANIES
113  * COMPANIES (NUMBER OF TRUCKS - 1) TRUCKS FOR THE OTHER CRITICAL COMPANIES
114  * RESERVE (INTEGER(NUMBER OF TRUCKS/NUMBER CRITICAL COMPANIES))(NUMBER OF
115  * CRITICAL COMPANIES - 1) TRUCKS FOR THE OTHER CRITICAL COMPANIES
116  * ELSE
117  * TEMPORARILY DECREASE THE AMOUNT ON HAND BY THE AMOUNT ON THE RESERVED TRUCKS
118  * ENCLIF
119  * ALLOCATE THE COMPANY THE MINIMUM OF THE AMOUNT ON HAND OR THE AMOUNT REQUESTED
120  * DETERMINE THE NUMBER OF FULL TRUCKLOADS REQUIRED TO MOVE THE AMMUNITION/FUEL
121  * ALLOCATED
122  * ALTER THE PERCENTAGE OF A LOAD FOR ANY PARTIAL LOAD REMAINING
123  * CALL RS_UPDATE FOR THE NUMBER OF FULL TRUCKLOADS REQUIRED-----> ( 7)
124  * IF THE PARTIAL LOAD IS GREATER THAN *50% OF A TRUCK LOAD* AND THE COMPANY*LN
125  * IS APPROACHING CRITICAL
126  * CALL RS_UPDATE FOR THE ADDITION TRUCKLOAD TO CARRY THE PARTIAL LOAD----> ( 7)
127  * ELSE
128  *
129  *
130  *
131  *
132  *
133  *
134  *
135  *
136  *

```


LINE	PAGE		
138	6	IF THE PARTIAL LOAD IS GREATER THAN '25% OF A TRUCK LOAD' AND THE	
140		COMPANY*LCN IS IS CRITICAL	
142		CALL RS_UPDATE FOR THE ADDITIONAL TRUCKLOAD TO CARRY THE PARTIAL	7)
143		LOAD----->(
144		ENDIF	
145		ENDIF	
146		LCCP	
147		RELEASE ALL RESERVED TRUCKS	
		SCHEDULE RS_MISSION IN 'ALLOCATION PROCESS TIME LAG'----->(8)
		ENDROUTINE	

LINE

PAGE 7

```

148 ROUTINE RS_UPDATE
149 ***
150 * THIS ROUTINE IS CALLED BY RS_ALLOCATE FOR A SPECIFIC AMMUNITION/FUEL TYPE. IT
151 * TRANSFERS TRUCKS AND STOCKS FROM THE TRAINS TO THE CONVOY BEING FORMED FOR
152 * THE COMPANY CURRENTLY BEING CONSIDERED.
153 *
154 * THE CONVOY NUMBER OF TRUCKS ATTRIBUTES TO THE TOTAL TRUCKS ASSIGNED
155 * UPDATE THE CONVOY AMMUNITION/FUEL TYPE ATTRIBUTES TO REFLECT THE AMOUNT IN HAND
156 * DECREMENT THE TRUCKS OWNER ATTRIBUTE TO SHOW THAT IT BELONGS TO THE CONVOY
157 * DECREMENT THE TRAINS AMMUNITION/FUEL TYPE ATTRIBUTE BY THE AMOUNT SENT WITH THE
158 * CONVOY
159 *
160 * DECREMENT BY AMMUNITION/FUEL TYPE THE TRAINS ATTRIBUTE SHOWING THE NUMBER OF
161 * TRUCKS IN HAND
162
163 ENDFCUTINE

```



```

165 EVENT RS_MISSION
166 ** THIS EVENT IS SCHEDULED BY RS_ALLOCATE FOR EACH COMPANY IN A USER INPUT TIME
167 ** LAG THAT SIMULATES THE TIME REQUIRED TO PROCESS A SUPPLY REQUEST AND ASSEMBLE
168 ** A CONVOY.
169 **
170 CALL RS_START_MOVE TO MOVE THE CONVOY TO THE DESIGNATED COMPANY RESUPPLY
171 AREA----->( 9)
173 ACC CNE TO THE COMPANY*SUPPLY*STATUS
174 SCHEDULE RS_CONVOY_ARRIVE TO DETERMINE IF THE CONVOY HAS ARRIVED----->( 11)
175 ENDEVENT

```



```

LINE 194  EVENT RS_CONVOY_ARRIVE
195  ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** ** 
196  ** ** ** IS SCHEDULED FOR EACH CONVOY AND DETERMINES WHEN THE CONVOY HAS
197  ** ** ** REACHED ITS DESTINATION. DEPENDING ON THE RESUPPLY TACTIC, IT THEN STARTS TO
198  ** ** ** REBUILD A RESUPPLY AREA FOR AMMUNITION OR FUEL.
199  ** ** ** COMPANY ** ** ** ** ** ** ** ** ** ** 
200  ** ** ** ** ** ** ** ** ** ** 
201  ** ** ** IF THE CONVOY HAS ARRIVED AT COMPANY RESUPPLY AREA
202  ** ** ** ** ** ** ** ** ** ** 
203  ** ** ** CC FOR EACH AMMUNITION/FUEL TYPE AVAILABLE IN THE CONVOY
204  ** ** ** DETERMINE THE AMOUNT OF AMMUNITION/FUEL THAT ARRIVED ON THE CONVOY
205  ** ** ** DETERMINE THE NUMBER OF TRUCKS ON HAND
206  ** ** ** LCCP
207  ** ** ** DETERMINE THE AREA SUPPRESSION INDEX
208  ** ** ** IF THE AREA SUPPRESSION INDEX IS LESS THAN THE ABORT MISSION THRESHOLD
209  ** ** ** CC
210  ** ** ** DETERMINE COMPANY RESUPPLY TACTIC
211  ** ** ** IF DETERMINE COMPANY RESUPPLY TACTIC IS CACHE
212  ** ** ** ELSE
213  ** ** ** CC
214  ** ** ** FOR EACH AMMUNITION TYPE
215  ** ** ** IF THE NUMBER OF AMMUNITION TRUCKS IS EQUAL TO ZERO AND THE NUMBER OF
216  ** ** ** FUEL TRUCKS IS GREATER THAN ZERO
217  ** ** ** CALL RS_START_MOVE TO MOVE TWO COMBAT VEHICLES NEEDING THIS
218  ** ** ** AMMUNITION TYPE BY LON TO THE COMPANY RESUPPLY AREA TO
219  ** ** ** REFUEL
220  ** ** ** SCHEDULE RS_CV_ARRIVE
221  ** ** ** ELSE
222  ** ** ** CALL RS_START_MOVE TO MOVE TWO COMBAT VEHICLES NEEDING THIS
223  ** ** ** AMMUNITION TYPE PER TRUCK BY LON TO THE COMPANY RESUPPLY
224  ** ** ** AREA
225  ** ** ** SCHEDULE RS_CV_ARRIVE
226  ** ** ** ENCIF
227  ** ** ** LOOP
228  ** ** ** ENDOF
229  ** ** ** ELSE
230  ** ** ** CALL RS_END_MISSION
231  ** ** ** ENCIF
232  ** ** ** ELSE

```


LINE		PAGE	12
232	IF THE CONVOY TRUCKS ARE ALIVE		
233	SCHEDULE RS_CONVOY_ARRIVE		
234	ELSE		
235	DO FOR EACH AMMUNITION/FUEL TYPE		
236	ADJUST COMPANY AMOUNT ALLOCATED		
237	AMMUNITION/FUEL ATTRIBUTE		
238	LOOP		
239	ENDIF		
240	ENDIF		
241	ENDEVENT		
242			


```

283 EVENT RS_CV_ARRIVE
284 *** THIS EVENT IS SCHEDULED FOR COMBAT VEHICLES WHICH NEED A SPECIFIC AMMUNITION
285 *** TYPE. IT DETERMINES WHEN THE COMPANY RESUPPLY AREA). IF THE LOCATION IS THE COMPANY
286 *** (RESUPPLY AREA, IT STARTS THE REARMING/REFUELING OF THE COMPANY.
287 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
288 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
289 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
290 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
291 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
292 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
293 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
294 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
295 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
296 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
297 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
298 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
299 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
300 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
301 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
302 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
303 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
304 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
305 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
306 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
307 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
308 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
309 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
310 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
311 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
312 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
313 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
314 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
315 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
316 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
317 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
318 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
319 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
320 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
321 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
322 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
323 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION
324 *** DETERMINE THE LOCATION OF THE COMBAT RESUPPLY AREA
325 *** IF THE COMBAT VEHICLES HAVE ARRIVED AT THEIR DESTINATION

```


LINE			PAGE	15
327	IF	COMBAT VEHICLES ARE ALIVE		
328	SCHEDULE	RS_CV_ARRIVE		
329	ENDIF			
330	ENDIF			
331	ENDEVENT			

----->(14)

LINE

PAGE 16

```

EVENT RS_ENCLCAD
** THIS EVENT IS SCHEDULED FOR A COMBAT VEHICLE. IT COMPLETES THE REFUELING
** PROCESS AND VEHICLE BACK TO ITS BATTLE POSITION. IF ANOTHER
** COMBAT VEHICLE IS WAITING FOR THIS REFUELING PROCESS, IT WILL THE
** FUEL IS SUPPLY MISSION HAS BEEN COMPLETED. IT CHECKS IF
** THE VEHICLE LCN TO FULL THE NUMBER OF VEHICLES REARMED
** UPDATE VEHICLE AMMUNITION TYPE THE NUMBERS TO ZERO
** INITIALIZE AMMUNITION/FUEL TYPE
** IF THE QUANTITY CN HAND EQUALS ZERO OR FOR THIS AMMUNITION/FUEL TYPE THE NUMBER
** OF VEHICLES ALIVE EQUALS THE NUMBER VEHICLES FULL
** IF ACC CNE TO END MISSION COUNTER
** END IF
LOOP
IF END MISSION COUNTER EQUALS LOOP COUNTER
** CALL RS_END_MISSION-----> ( 19)
** END IF
** DETERMINE THE AREA*SUPPRESSION*INDEX
** IF THE AREA*SUPPRESSION*INDEX IS LESS THAN THE ABORT*MISSION*THRESHOLD*
** CALL RS_FUEL-----> ( 17)
** IF THE AMOUNT OF AMMUNITION ON HAND IS GREATER THAN ZERO
** CALL RS_START_MOVE TO MOVE THE NEXT COMBAT VEHICLE BY LCN TO THE COMPANY
** RESUPPLY AREA-----> ( 9)
** SCHEDULE RS_CV_ARRIVE FOR THESE VEHICLES-----> ( 14)
** END IF
ELSE
** CALL RS_END_MISSION-----> ( 19)
** CALL RS_START_MOVE TO MOVE ALL COMBAT VEHICLES IN THE COMPANY RESUPPLY AREA
** BACK TO THEIR BATTLE POSITIONS-----> ( 9)
** END IF
ENDEVENT

```


LINE

```

369 ROUTINE RS_FUEL
370 ** THIS ROUTINE IS CALLED FOR A VEHICLE NEEDING A SPECIFIC FUEL TYPE. IF A REFUEL
371 ** PCINT IS IDLE, THE VEHICLE STARTS REFUELING, OTHERWISE THE VEHICLE IS PLACED
372 ** IN A QUEUE
373 **
374 ** DEFINE THE COMPANY POL QUEUE AS FIRST IN FIRST OUT
375 ** DETERMINE IF AT IS IDLE
376 ** IF REFUEL POINT IS IDLE
377 ** IF THE AMOUNT OF FUEL ON HAND
378 ** IF THE AMOUNT IS GREATER THAN THE FUEL NEEDED
379 ** UPDATE THE COMBAT VEHICLE FUEL TYPE ATTRIBUTE TO FULL
380 ** UPDATE THE COMBAT VEHICLE FUEL TYPE ATTRIBUTE BY THE AMOUNT NEEDED
381 ** DETERMINE THE CONVOY/CACHE FUEL TYPE WITH THE AMOUNT NEEDED
382 ** DETERMINE THE TIME REQUIRED TO REFUEL
383 ** SCHEDULE RS_END_FUEL----->( 18)
384 **
385 ** ELSE
386 ** UPDATE THE COMBAT VEHICLE FUEL TYPE ATTRIBUTE BY THE AMOUNT ON HAND
387 ** DETERMINE THE TIME REQUIRED TO REFUEL WITH THE AMOUNT ON HAND
388 ** SCHEDULE RS_END_FUEL----->( 18)
389 ** SET THE CONVOY/CACHE FUEL TYPE ATTRIBUTE TO ZERO
390 **
391 ** ENDIF
392 **
393 ** ELSE IF THE AMOUNT OF THE FUEL TYPE IS GREATER THAN ZERO
394 ** ADD COMBAT VEHICLE TO THE COMPANY POL QUEUE
395 **
396 ** ELSE
397 ** CALL RS_START_MOVE TO MOVE THE COMBAT VEHICLE BACK TO ITS BATTLE
398 ** POSITION----->( 9)
399 **
400 ** ENDCIF
401 ** ENDCROUTINE

```


LINE

PAGE 18

```

400 EVENT RS_END_FUEL
401 ** THIS EVENT IS SCHEDULED FOR A COMBAT VEHICLE. IT COMPLETES THE REFUELING
402 ** PROCESS AND MOVES THE COMBAT VEHICLE BACK TO ITS BATTLE POSITION. IF ANOTHER
403 ** COMBAT VEHICLE IS WAITING IN THE QUEUE FOR THIS FUEL TYPE, THE EVENT WILL
404 ** START THE REFUEL PROCESS FOR IT. THIS EVENT ALSO CHECKS FOR THE COMPLETION OF
405 ** THE MISSION.
406 **
407 ** UPDATE VEHICLE LCN TO FULL
408 ** INCREASE THE NUMBER OF VEHICLES REFUELED BY ONE
409 ** SET THE START POINT TO IDLE
410 ** CALL THE START MOVE TO MISSION COUNTERS TO ZERO
411 ** INITIALIZE LOOP AND MISSION/FUEL TYPE
412 ** DO FOR EACH AMMUNITION/FUEL TYPE
413 ** IF THE QUANTITY ON HAND EQUALS THE NUMBER VEHICLES FULL
414 ** IF THE VEHICLES TO END MISSION COUNTER
415 ** IF ADD ONE TO END MISSION COUNTER
416 **
417 ** ENDF
418 **
419 ** LCCP
420 ** IF END MISSION COUNTER EQUALS LOOP COUNTER
421 ** IF CALL RS_END_MISSION----->( 19)
422 ** ENDF
423 ** IF THERE IS A COMBAT VEHICLE IN THE COMPANY POL QUEUE
424 ** IF THE AMOUNT OF FUEL ON HAND IS GREATER THAN ZERO
425 ** TAKE THE FIRST VEHICLE IN THE QUEUE
426 ** CALL RS_FUEL----->( 17)
427 ** ENDF
428 ** ELSE IF THE AMOUNT FUEL ON HAND IS GREATER THAN ZERO AND ANY AMMUNITION TYPE AMOUNT
429 ** IS EQUAL TO ZERO
430 ** IF THE COMPANY POL QUEUE IS GREATER THAN ZERO
431 ** CALL RS_START_MOVE TO MOVE THE NEXT COMBAT VEHICLE BY LCN TO THE COMPANY
432 ** CALL RS_SUPPLY_AREA TO REFUEL
433 ** SCHEDULE RS_CV_ARRIVE----->( 14)
434 ** LCCP
435 ** ENDF
436 ** ENDF
437 ** ENDF
438 ** ENDF
439 ** ENDF
440 ** ENDF

```


三十二

```

4441 ROUTINE RS_END MISSION
4442 *** THIS ROUTINE IS CALLED WHENEVER A SUPPLY MISSION HAS BEEN TERMINATED AND IS
4443 *** USED TO INDICATE THAT THE SUPPLY STATUS HAS CHANGED.
4444 ***
4445 *** SUPTRACT ONE FROM THE COMPANY*SUPPLY*STATUS
4446 *** CALL RS_TRUCK_UPDATE FOR ALL CONVOY/CACHE TRUCKS----->( 20)
4447 ENDCROUTINE
4448

```


LINE

```

449 ROUTINE RS_TRUCK_UPDATE
450 *****
451 * THIS ROUTINE IS CALLED FOR CONVCY/CACHE TRUCKS TO ADJUST THE AMOUNT OF
452 * AMMUNITION/FUEL ON EACH TRUCK PRIOR TO THEIR MOVE BACK TO THE BATTALION TRAINS
453 * AREA.
454 *****
455 CC FOR EACH AMMUNITION/FUEL TYPE
456 DETERMINE THE AMOUNT OF AMMUNITION/FUEL LEFT ON HAND
457 DETERMINE THE NUMBER OF TRUCKS ALIVE
458 DETERMINE THE AVERAGE TRUCKLOAD
459 CC FOR EACH TRUCK ALIVE
460 CC UPDATE TRUCKLOAD SIZE ATTRIBUTE TO AVERAGE LOAD
461 LCCP
462 LCCP
463 CALL RS_START_MOVE TO MOVE COMPANY/CACHE TRUCKS BACK TO THE BATTALION TRAINS
464 AREA
465 SCHEDULE RS_TRAINS_ARRIVE-----> ( 9 )
466 ENROUTINE-----> ( 21 )

```


[illegible]

LINE

```

511 EVENT RS_ATP_ARRIVE
512 *** THIS EVENT IS SCHEDULED FOR EVERY BATTALION AMMUNITION TRUCK SENT TO THE ATP.
513 *** IF THE ATP IS BUSY OR IN A STOCKOUT POSITION FOR THE AMMUNITION TYPE, THE
514 *** EVENT SENDS THE TRUCK TO THE ASP. IF THE TRUCKS REMAINS AT THE ATP, THE
515 *** EVENT STARTS THE RELOAD PROCESS OR THE TRUCK WAIT IN A QUEUE.
516 *** DEFINE THE BATTALION AMMUNITION TYPE QUEUES AS FIRST, IN FIRST OUT
517 *** IF THE BATTALION AMMUNITION TYPE TRUCK HAS ARRIVED AT THE ATP
518 *** IF THE LOADER IS IDLE
519 *** IF THE AMMUNITION TYPE TRUCK IS ON HAND OF THE AMMUNITION TYPE IS GREATER THAN .50% OF THE
520 *** IF THE AMMUNITION TYPE TRUCK IS ON HAND OF THE AMMUNITION TYPE IS GREATER THAN .50% OF THE
521 *** UPDATE THE BATTALION TRUCK AMMUNITION TYPE ATTRIBUTE BY THE MINIMUM OF
522 *** THE AMOUNT ON HAND OR THE AMOUNT NEEDED
523 *** DECREMENT THE ATP AMMUNITION TYPE ATTRIBUTE BY THE MINIMUM OF THE AMOUNT
524 *** ON HAND OR THE AMOUNT NEEDED
525 *** DETERMINE THE TIME REQUIRED TO LOAD THE AMMUNITION
526 *** SCHEDULE RS_ATP_LEAVE----->( 23)
527 *** SET THE LOADER TO BUSY
528 *** ELSE SCHEDULE RS_ASP_RETURN----->( 24)
529 *** ENDF
530 *** ELSE
531 *** IF THE AMOUNT ON HAND OF THE AMMUNITION TYPE IS LESS THAN .50% OF THE
532 *** AMMUNITION NEEDED, OR THE QUEUE TIME IS GREATER THAN THE .ASP TRIP LENGTH,
533 *** SCHEDULE RS_ASP_RETURN----->( 24)
534 *** ELSE
535 *** ADD THE BATTALION AMMUNITION TRUCK TO THE ATP QUEUE FOR THAT AMMUNITION
536 *** TYPE
537 *** UPDATE THE BATTALION AMMUNITION TRUCK AMMUNITION TYPE ATTRIBUTE BY THE
538 *** MINIMUM OF THE AMOUNT ON HAND OR THE AMOUNT NEEDED
539 *** DECREMENT THE ATP AMMUNITION TYPE ATTRIBUTE BY THE MINIMUM OF THE AMOUNT
540 *** ON HAND OR THE AMOUNT NEEDED
541 *** ENDF
542 *** ENDF
543 *** ELSE
544 *** IF THE BATTALION AMMUNITION TRUCK IS STILL ALIVE
545 *** SCHEDULE RS_ATP_ARRIVE----->( 22)
546 *** ENDF
547 *** ENDF
548 *** ENDF
549 *** ENDF
550 *** ENDF
551 *** ENDF

```


LINE

PAGE 23

```

552  EVENT RS_ATP_LEAVE
553  ** THIS EVENT IS SCHEDULED FOR EVERY BATTALION AMMUNITION TRUCK RELOADED AT THE
554  ** ATP. IT COMPLETES THE RELOAD PROCESS AND SENDS THE TRUCK BACK TO THE BATTALION
555  ** AREA FOR THE SAME AMMUNITION TYPE.
556  ** GUESS FOR THE AMMUNITION TYPE.
557  ** DETERMINE THE AMMUNITION TYPE OF THE BATTALION AMMUNITION TRUCK
558  ** CALL RS_START_MOVE THE BATTALION TRUCK BACK TO THE BATTALION TRAINS
559  ** AREA.
560  ** SCHEDULE RS_TO_IDLE
561  ** SET LCADER IS A BATTALION AMMUNITION TRUCK IN THE ATP QUEUE FOR THAT AMMUNITION TYPE
562  ** IF TAKE THE RS ATP LEAVE
563  ** SCHEDULE THE LCADER TO BUSY
564  **
565  **
566  **
567  **
568  **
569  **
570  ENDEVENT

```


LINE

```

571 EVENT RS_ASP_RETURN
572 *** THIS EVENT IS SCHEDULED FOR ALL BATTALION AMMUNITION SENT TO THE ASP. IT
573 *** ACCENTS THE ASP. *** IT SENDS THE TRUCK BACK TO THE BATTALION AREA.
574 *** ATP TO THE ASP. *** IT SENDS THE TRUCK BACK TO THE BATTALION AREA.
575 *** BATTALION AMMUNITION TRUCK TYPE BACK TO THE BATTALION AREA.
576 *** BATTALION AMMUNITION TRUCK TYPE BACK TO THE BATTALION AREA.
577 CALL RS_START_MOVE TO MOVE THE BATTALION AMMUNITION TRUCK TYPE BACK TO THE BATTALION AREA.
578 AREA_A--> ( 9 )
580 SCHEDULE RS_TRAINS_ARRIVE--> ( 2 )
581 ENDEVENT

```


LINE

```

582  EVENT RS_PCL_ARRIVE
583  ** THIS EVENT IS SCHEDULED FOR EVERY BATTALION FUEL TRUCK SENT TO THE BRIGADE PCL
584  ** PCINT. WHEN THE TRUCK ARRIVES, THE EVENT STARTS THE REFILL PROCESS OR HAS THE
585  ** THE TRUCK WAIT IN A QUEUE FOR THAT FUEL TYPE.
586  ** DEFINE BRIGADE FUEL TYPE POL QUEUES AS FIRST IN FIRST OUT
587  ** IF THE BATTALION FUEL TRUCK HAS ARRIVED AT THE BRIGADE PCL POINT
588  ** DETERMINE THE AMOUNT OF FUEL TYPE ON HAND IN THE BRIGADE PCL POINT
589  ** DETERMINE THE 'NUMBER REFUEL POINTS', IDLE FOR THAT FUEL TYPE
590  ** IF A REFUEL POINT IS IDLE
591  ** IF THE AMOUNT OF THE FUEL TYPE ON HAND IS GREATER THAN '100% OF THE FUEL
592  ** I NEEDED,
593  ** IF THERE IS A BATTALION FUEL TRUCK IN THE BRIGADE PCL QUEUE
594  ** FILE ARRIVING TRUCK IN THE BRIGADE PCL QUEUE
595  ** TAKE THE NEXT TRUCK IN THE QUEUE
596  ** IF
597  ** UPDATE THE BATTALION FUEL TRUCK FUEL TYPE ATTRIBUTE BY THE AMOUNT OF
598  ** FUEL NEEDED
599  ** DECREMENT THE BRIGADE PCL POINT FUEL TYPE ATTRIBUTE BY THE AMOUNT OF
600  ** FUEL NEEDED
601  ** SET THE REFUEL POINT TO EUSY
602  ** SCHEDULE RS_POL_LEAVE----->( 26)
603  ** ELSE
604  ** ADD THE BATTALION FUEL TRUCK TO THE BRIGADE PCL QUEUE FOR THAT FUEL TYPE
605  ** ENDIF
606  ** ELSE
607  ** ADD THE BATTALION FUEL TRUCK TO THE BRIGADE PCL QUEUE FOR THAT FUEL TYPE
608  ** ENDIF
609  ** ENCI
610  ** ENCI
611  ** ENCI
612  ** ENCI
613  ** ENCI
614  ** ENCI
615  ** ENCI
616  ** ENCI
617  ** ENCI
618  ** ENCI
619  ** ENCI
620  ** ENCI
621  ** ENCI
622  ** ENCI
623  ** ENCI
624  ** ENCI
625  ** ENCI
626  ** ENCI
627  ** ENCI
628  ** ENCI
629  ** ENCI
630  ** ENCI
631  ** ENCI
632  ** ENCI
633  ** ENCI
634  ** ENCI
635  ** ENCI
636  ** ENCI
637  ** ENCI
638  ** ENCI
639  ** ENCI
640  ** ENCI
641  ** ENCI
642  ** ENCI
643  ** ENCI
644  ** ENCI
645  ** ENCI
646  ** ENCI
647  ** ENCI
648  ** ENCI
649  ** ENCI
650  ** ENCI
651  ** ENCI
652  ** ENCI
653  ** ENCI
654  ** ENCI
655  ** ENCI
656  ** ENCI
657  ** ENCI
658  ** ENCI
659  ** ENCI
660  ** ENCI
661  ** ENCI
662  ** ENCI
663  ** ENCI
664  ** ENCI
665  ** ENCI
666  ** ENCI
667  ** ENCI
668  ** ENCI
669  ** ENCI
670  ** ENCI
671  ** ENCI
672  ** ENCI
673  ** ENCI
674  ** ENCI
675  ** ENCI
676  ** ENCI
677  ** ENCI
678  ** ENCI
679  ** ENCI
680  ** ENCI
681  ** ENCI
682  ** ENCI
683  ** ENCI
684  ** ENCI
685  ** ENCI
686  ** ENCI
687  ** ENCI
688  ** ENCI
689  ** ENCI
690  ** ENCI
691  ** ENCI
692  ** ENCI
693  ** ENCI
694  ** ENCI
695  ** ENCI
696  ** ENCI
697  ** ENCI
698  ** ENCI
699  ** ENCI
700  ** ENCI
701  ** ENCI
702  ** ENCI
703  ** ENCI
704  ** ENCI
705  ** ENCI
706  ** ENCI
707  ** ENCI
708  ** ENCI
709  ** ENCI
710  ** ENCI
711  ** ENCI
712  ** ENCI
713  ** ENCI
714  ** ENCI
715  ** ENCI
716  ** ENCI
717  ** ENCI
718  ** ENCI
719  ** ENCI
720  ** ENCI
721  ** ENCI
722  ** ENCI
723  ** ENCI
724  ** ENCI
725  ** ENCI
726  ** ENCI
727  ** ENCI
728  ** ENCI
729  ** ENCI
730  ** ENCI
731  ** ENCI
732  ** ENCI
733  ** ENCI
734  ** ENCI
735  ** ENCI
736  ** ENCI
737  ** ENCI
738  ** ENCI
739  ** ENCI
740  ** ENCI
741  ** ENCI
742  ** ENCI
743  ** ENCI
744  ** ENCI
745  ** ENCI
746  ** ENCI
747  ** ENCI
748  ** ENCI
749  ** ENCI
750  ** ENCI
751  ** ENCI
752  ** ENCI
753  ** ENCI
754  ** ENCI
755  ** ENCI
756  ** ENCI
757  ** ENCI
758  ** ENCI
759  ** ENCI
760  ** ENCI
761  ** ENCI
762  ** ENCI
763  ** ENCI
764  ** ENCI
765  ** ENCI
766  ** ENCI
767  ** ENCI
768  ** ENCI
769  ** ENCI
770  ** ENCI
771  ** ENCI
772  ** ENCI
773  ** ENCI
774  ** ENCI
775  ** ENCI
776  ** ENCI
777  ** ENCI
778  ** ENCI
779  ** ENCI
780  ** ENCI
781  ** ENCI
782  ** ENCI
783  ** ENCI
784  ** ENCI
785  ** ENCI
786  ** ENCI
787  ** ENCI
788  ** ENCI
789  ** ENCI
790  ** ENCI
791  ** ENCI
792  ** ENCI
793  ** ENCI
794  ** ENCI
795  ** ENCI
796  ** ENCI
797  ** ENCI
798  ** ENCI
799  ** ENCI
800  ** ENCI
801  ** ENCI
802  ** ENCI
803  ** ENCI
804  ** ENCI
805  ** ENCI
806  ** ENCI
807  ** ENCI
808  ** ENCI
809  ** ENCI
810  ** ENCI
811  ** ENCI
812  ** ENCI
813  ** ENCI
814  ** ENCI
815  ** ENCI
816  ** ENCI
817  ** ENCI
818  ** ENCI
819  ** ENCI
820  ** ENCI
821  ** ENCI
822  ** ENCI
823  ** ENCI
824  ** ENCI
825  ** ENCI
826  ** ENCI
827  ** ENCI
828  ** ENCI
829  ** ENCI
830  ** ENCI
831  ** ENCI
832  ** ENCI
833  ** ENCI
834  ** ENCI
835  ** ENCI
836  ** ENCI
837  ** ENCI
838  ** ENCI
839  ** ENCI
840  ** ENCI
841  ** ENCI
842  ** ENCI
843  ** ENCI
844  ** ENCI
845  ** ENCI
846  ** ENCI
847  ** ENCI
848  ** ENCI
849  ** ENCI
850  ** ENCI
851  ** ENCI
852  ** ENCI
853  ** ENCI
854  ** ENCI
855  ** ENCI
856  ** ENCI
857  ** ENCI
858  ** ENCI
859  ** ENCI
860  ** ENCI
861  ** ENCI
862  ** ENCI
863  ** ENCI
864  ** ENCI
865  ** ENCI
866  ** ENCI
867  ** ENCI
868  ** ENCI
869  ** ENCI
870  ** ENCI
871  ** ENCI
872  ** ENCI
873  ** ENCI
874  ** ENCI
875  ** ENCI
876  ** ENCI
877  ** ENCI
878  ** ENCI
879  ** ENCI
880  ** ENCI
881  ** ENCI
882  ** ENCI
883  ** ENCI
884  ** ENCI
885  ** ENCI
886  ** ENCI
887  ** ENCI
888  ** ENCI
889  ** ENCI
890  ** ENCI
891  ** ENCI
892  ** ENCI
893  ** ENCI
894  ** ENCI
895  ** ENCI
896  ** ENCI
897  ** ENCI
898  ** ENCI
899  ** ENCI
900  ** ENCI
901  ** ENCI
902  ** ENCI
903  ** ENCI
904  ** ENCI
905  ** ENCI
906  ** ENCI
907  ** ENCI
908  ** ENCI
909  ** ENCI
910  ** ENCI
911  ** ENCI
912  ** ENCI
913  ** ENCI
914  ** ENCI
915  ** ENCI
916  ** ENCI
917  ** ENCI
918  ** ENCI
919  ** ENCI
920  ** ENCI
921  ** ENCI
922  ** ENCI
923  ** ENCI
924  ** ENCI
925  ** ENCI
926  ** ENCI
927  ** ENCI
928  ** ENCI
929  ** ENCI
930  ** ENCI
931  ** ENCI
932  ** ENCI
933  ** ENCI
934  ** ENCI
935  ** ENCI
936  ** ENCI
937  ** ENCI
938  ** ENCI
939  ** ENCI
940  ** ENCI
941  ** ENCI
942  ** ENCI
943  ** ENCI
944  ** ENCI
945  ** ENCI
946  ** ENCI
947  ** ENCI
948  ** ENCI
949  ** ENCI
950  ** ENCI
951  ** ENCI
952  ** ENCI
953  ** ENCI
954  ** ENCI
955  ** ENCI
956  ** ENCI
957  ** ENCI
958  ** ENCI
959  ** ENCI
960  ** ENCI
961  ** ENCI
962  ** ENCI
963  ** ENCI
964  ** ENCI
965  ** ENCI
966  ** ENCI
967  ** ENCI
968  ** ENCI
969  ** ENCI
970  ** ENCI
971  ** ENCI
972  ** ENCI
973  ** ENCI
974  ** ENCI
975  ** ENCI
976  ** ENCI
977  ** ENCI
978  ** ENCI
979  ** ENCI
980  ** ENCI
981  ** ENCI
982  ** ENCI
983  ** ENCI
984  ** ENCI
985  ** ENCI
986  ** ENCI
987  ** ENCI
988  ** ENCI
989  ** ENCI
990  ** ENCI
991  ** ENCI
992  ** ENCI
993  ** ENCI
994  ** ENCI
995  ** ENCI
996  ** ENCI
997  ** ENCI
998  ** ENCI
999  ** ENCI
1000 ** ENCI

```



```

EVENT RS POL_LEAVE
** THIS EVENT IS SCHEDULED FOR EVERY BATTALION FUEL TRUCK REFUELED AT THE BRIGADE
** POL POINT. TRAINS. IT COMPLETES THE REFILL PROCESS AND SENDS THE TRUCK BACK TO THE
** RS TANKER RETURN. IF A POL POINT TANKER HAS BEEN EMPTIED, IT SCHEDULES
** DETERMINE FUEL TYPE OF THE BATTALION FUEL TRUCK
CALL RS_START_MOVE TO MOVE THE BATTALION FUEL TRUCK BACK TO THE BATTALION
TRAINS AREA
SCHEDULE RS_TRAINS_ARRIVE
DETERMINE THE NUMBER POL TANKERS% ON HAND AND ALIVE FOR THAT FUEL TYPE
DETERMINE THE BRIGADE POL POINT FUEL TYPE CAPACITY
DETERMINE THE AMOUNT OF THE FUEL TYPE ON HAND IN THE BRIGADE POL POINT
IF THE BRIGADE POL POINT CAPACITY MINUS THE AMOUNT ON HAND IS GREATER THAN 1
'TANKER_LOAD%
DETERMINE THE ROUND TRIP OF A TANKER TO THE DISCOM POL POINT
SCHEDULE RS_TANKER_RETURN
SUBTRACT ONE FROM THE 'NUMBER POL TANKERS%' ON HAND FOR THAT FUEL TYPE
ENDIF
IF THERE IS A BATTALION FUEL TRUCK IN THE BRIGADE POL QUEUE
IF THE AMOUNT OF THE FUEL TYPE ON HAND IS GREATER THAN '100% OF THE FUEL
NEEDED'
TAKE THE NEXT FUEL TRUCK IN THE BRIGADE POL QUEUE
UPDATE BATTALION FUEL TRUCK FUEL TYPE ATTRIBUTE BY THE AMOUNT OF FUEL NEEDED
DECREMENT THE BRIGADE POL POINT FUEL TYPE ATTRIBUTE BY THE AMOUNT OF FUEL
NEEDED
SCHEDULE RS_POL_LEAVE
ELSE
SET THE REFUEL POINT TO IDLE
ENDIF
ELSE
SET THE REFUEL POINT TO IDLE
ENDIF
ENDEVENT

```


LINE

```

660  EVENT RS TANKER RETURN
661  ** THIS EVENT IS SCHEDULED FOR ALL EMPTY DISCOM PCL TANKERS AT THE BRIGADE POL
662  ** PCINT TO ACCOUNT FOR THE TIME IT WOULD TAKE TO MAKE A ROUND TRIP TO
663  ** PCL POINT.
664  ** ** BRIGADE TANKERS ALIVE
665  ** ** CF BRIGADE TANKERS# ON HAND
666  ** ** UPDATE NUMBER POL TANKERS# ON HAND
667  ** ** ACC QUANTITY DELIVERED TO BRIGADE POL POINT FUEL TYPE ATTRIBUTES
668  ** ** ENDEVENT
669

```


LINE

PAGE 28

```
670 EVENT RS_CSA_CONVCY
671 *****
672 * THIS EVENT IS SCHEDULED PERIODICALLY TO SIMULATE THE ARRIVAL OF CCRRPS
673 * AMMUNITION CONVCYS AT THE ATP.
674 *****
675 SCHEDULE RS_CSA_CONVCY TO ARRIVE EVERY SPECIFIED TIME INTERVAL.----->( 28)
676 CC FOR EACH THE ATP AMMUNITION TYPE
677 LCCP
678 LCCP
679 ENDEVENT
```



```

*****
PAGE      MODULE REFERENCE TRF#      *****
LN
45 26 . . . . . RS-POL-LEAVE 39
46 25 . . . . . RS-POL-ARRIVE 38
47 21 . . . . . RS-TRAINS-ARRIVE 20
48 17 . . . . . RS-FUEL-EXPANDED ON LINE 20
49 18 . . . . . RS-FUEL-EXPANDED ON LINE 20
50 19 . . . . . RS-FUEL-EXPANDED ON LINE 20
51 17 . . . . . RS-FUEL-EXPANDED ON LINE 20
52 14 . . . . . RS-FUEL-EXPANDED ON LINE 20
53 9 . . . . . RS-FUEL-EXPANDED ON LINE 20
54 9 . . . . . RS-FUEL-EXPANDED ON LINE 20
55 14 . . . . . RS-FUEL-EXPANDED ON LINE 20
56 17 . . . . . RS-FUEL-EXPANDED ON LINE 20
57 14 . . . . . RS-FUEL-EXPANDED ON LINE 20
58 9 . . . . . RS-FUEL-EXPANDED ON LINE 20
59 9 . . . . . RS-FUEL-EXPANDED ON LINE 20
60 14 . . . . . RS-FUEL-EXPANDED ON LINE 20
61 17 . . . . . RS-FUEL-EXPANDED ON LINE 20
62 19 . . . . . RS-FUEL-EXPANDED ON LINE 20
63 9 . . . . . RS-FUEL-EXPANDED ON LINE 20
64 14 . . . . . RS-FUEL-EXPANDED ON LINE 20
65 17 . . . . . RS-FUEL-EXPANDED ON LINE 20
66 19 . . . . . RS-FUEL-EXPANDED ON LINE 20
67 9 . . . . . RS-FUEL-EXPANDED ON LINE 20
68 14 . . . . . RS-FUEL-EXPANDED ON LINE 20
69 17 . . . . . RS-FUEL-EXPANDED ON LINE 20
70 19 . . . . . RS-FUEL-EXPANDED ON LINE 20
71 9 . . . . . RS-FUEL-EXPANDED ON LINE 20
72 14 . . . . . RS-FUEL-EXPANDED ON LINE 20
73 17 . . . . . RS-FUEL-EXPANDED ON LINE 20
74 19 . . . . . RS-FUEL-EXPANDED ON LINE 20
75 9 . . . . . RS-FUEL-EXPANDED ON LINE 20
76 14 . . . . . RS-FUEL-EXPANDED ON LINE 20
77 17 . . . . . RS-FUEL-EXPANDED ON LINE 20
78 19 . . . . . RS-FUEL-EXPANDED ON LINE 20
79 9 . . . . . RS-FUEL-EXPANDED ON LINE 20
80 14 . . . . . RS-FUEL-EXPANDED ON LINE 20
81 17 . . . . . RS-FUEL-EXPANDED ON LINE 20
82 19 . . . . . RS-FUEL-EXPANDED ON LINE 20
83 9 . . . . . RS-FUEL-EXPANDED ON LINE 20
84 14 . . . . . RS-FUEL-EXPANDED ON LINE 20
85 17 . . . . . RS-FUEL-EXPANDED ON LINE 20
86 19 . . . . . RS-FUEL-EXPANDED ON LINE 20
87 9 . . . . . RS-FUEL-EXPANDED ON LINE 20

```


PAGE 14	EVENT RS_CV_ARRIVE	300	210
PAGE 16	EVENT RS_ENCLD	332	
RS_EVALUATE 2	EVENT RS_EVALUATE	11	18
RS_FUEL 14	EVENT RS_CV_ARRIVE	303	
PAGE 16	EVENT RS_ENCLD	357	
PAGE 17	ROUTINE RS_FUEL	369	
PAGE 18	EVENT RS_ENCLD_FUEL	428	
RS_MISSICN 6	ROUTINE RS_ALLOCATE	146	
PAGE 8	EVENT RS_MISSION	165	
RS_CFFLCL 11	EVENT RS_CCNVY_ARRIVE	211	
PAGE 13	EVENT RS_CCFLD_LOAD_CACHE	243	
RS_PCL_ARRIVE 21	EVENT RS_TRAINS_ARRIVE	497	617
PAGE 25	EVENT RS_PCL_ARRIVE	582	
RS_PCL_LEAVE 25	EVENT RS_PCL_LEAVE	606	652
PAGE 26	EVENT RS_PCL_LEAVE	621	
RS_START_MOVE 8	EVENT RS_MISSION	171	
PAGE 5	ROUTINE RS_START_MOVE	176	227
PAGE 11	EVENT RS_CCNVY_ARRIVE	216	267
PAGE 13	EVENT RS_CCFLD_LOAD_CACHE	263	320
PAGE 14	EVENT RS_CV_ARRIVE	315	365
PAGE 16	EVENT RS_CV_ARRIVE	359	
PAGE 17	ROUTINE RS_ENCLD_FUEL	395	434
PAGE 18	ROUTINE RS_ENCLD_FUEL_UPDATE	411	
PAGE 20	ROUTINE RS_TRAINS_ARRIVE	463	490
PAGE 21	EVENT RS_TRAINS_LEAVE	493	
PAGE 22	EVENT RS_ATF_LEAVE	500	
PAGE 23	EVENT RS_ATF_RETURN	578	
PAGE 26	EVENT RS_PCL_LEAVE	629	
RS_TANKER_RETURN 26	EVENT RS_PCL_LEAVE	640	
PAGE 27	EVENT RS_TANKER_RETURN	660	
PAGE 28	ROUTINE RS_TRUCK_UPDATE	465	507
RS_TRAINS_ARRIVE 21	EVENT RS_TRAINS_ARRIVE	467	
PAGE 23	EVENT RS_ATF_LEAVE	562	

IDENTIFIER	MODULE NAME	CROSS REFERENCE	MODULE LISTING	LINE NUMBERS	PAGE
PAGE 24	EVENT RS_ASP_RETURN			580	
RS_TRUCK_UPDATE	EVENT RS_POL_LEAVE			631	
PAGE 13	EVENT RS_OFFLOAD_CACHE			281	
PAGE 19	ROUTINE RS_ENC_MISSICK			447	
PAGE 20	ROUTINE RS_TRUCK_UPDATE			449	
RS_UPDATE	ROUTINE RS_ALLOCATE			132	135
PAGE 5	ROUTINE RS_ALLOCATE			140	
PAGE 6	ROUTINE RS_UPDATE			148	
PAGE 7	ROUTINE RS_UPDATE				

APPENDIX B: Suppression Logic

1. Introduction:

The play of suppression in STAR is designed to represent the effects of direct and indirect fire on delaying element functions. The play of suppression is parametric and the effects can be altered by the input parameters supplied by the user.

2. Assumptions:

- a. The suppressive effect of a round is a decaying phenomenon, and can be represented as a time delay in the performance of element functions.
- b. The suppressive effect of indirect fire is a function of the proximity of the impact to the target, and whether or not the round's impact is observed by the target.
- c. Different rounds have different suppressive effects and can be represented by different round "weights".
- d. The suppressive effect of direct fire rounds occurs if the round lands short, or if the round hits the target. Rounds which miss over a target are assumed to be unobserved and have no suppressive effect.
- e. The susceptibility to suppression of a particular weapon system can be represented by a parameter, and all similar weapon systems in the simulation have a common parameter

e.g. all XM1's have a $\lambda = 1$
all BMP's have a $\lambda = 1.3$
- f. The suppressive effects of a round fired are uniform for all vehicles in the target's platoon. (subject to different λ 's for different weapon systems within the same platoon).

- c. Rounds are assumed to have no suppressive effect after 2 minutes of simulation time.
- d. Each r_i has associated with it a factor d_i which represents the decaying effect of suppression over time.

For example:

$$\begin{aligned}d_1 &= 1 \\d_2 &= .5 \\d_3 &= .2 \\d_4 &= .05\end{aligned}$$

The total effect of rounds fired at a platoon can then be represented by an adjusted value R

$$\begin{aligned}R &= r_4 d_4 + r_3 d_3 + r_2 d_2 + r_1 d_1 \\&= .05r_4 + .2r_3 + .5r_2 + r_1\end{aligned}$$

- e. The suppressive effect of rounds on a particular weapon system is represented by a parameter λ .

i.e.

$$\begin{aligned}\lambda &= 1 \quad \text{for XM1's} \\ \lambda &= 2 \quad \text{for BMP's} \\ \lambda &= 10 \quad \text{for dismounted infantry}\end{aligned}$$

- f. A time delay can then be calculated based on R and λ

$$\text{time delay (t)} = e^{R\lambda} - 1$$

This time delay value is then used to effect the functions of a particular element in the simulation.

- g. The weighting of indirect fire rounds is represented as a function of proximity to the target and whether or not the impact of the round is observed by the target. The technique used is explained in a paper entitled "Suppression Methodology" (attached) and will not be further amplified herein.

3. Functions Represented:

- a. The effect of suppression on detection results in detections being delayed or eliminated.
- b. The effect of suppression on firing is to extend the lay/load time at target selection, and to increase aim error upon firing.
- c. The effect of unaimed direct fire is not currently implemented.
- d. The effects of suppression on unit or individual vehicle movement is not currently implemented.

4. Technique:

- a. The basic unit on which the suppression functions operate is the platoon. The suppressive of each round fired is represented by a "weight".
i.e. 120mm APDS weight = 1.0
 73mm HEAT weight = .65
 152mm Arty weight = 1.3
- b. The weights of all rounds fired at platoon elements are summed up and stored as attributes of the PLATOON.LEADER permanent entity. These attributes are reset every 30 seconds of the simulation.

$$\text{i.e. } r_i = r_{i-1} \quad i = 1 \text{ to } 4$$

where each r_i is the total suppressive weight of all rounds effecting elements of the platoon during a 30 second portion of the battle.

BIBLIOGRAPHY

1. Caldwell, W.J. and Meiers, W.D., An Air to Ground and Ground to Air Combined Arms Combat Simulation (STAR-AIR), M.S. Thesis, Naval Postgraduate School, Monterey, September 1979.
2. Department of the Army, FM 71-1, The Tank and Mechanized Infantry Company Team, June 1977.
3. Department of the Army, FM 71-2, The Tank and Mechanized Infantry Battalion Task Force, June 1977.
4. Department of the Army, FM 100-5, Operations, July 1976.
5. Department of the Army, FM 101-10-1, Staff Officer's Field Manual Organizational, Technical and Logistical Data, July 1976.
6. Department of the Army, U.S. Army Infantry School ST 7-157FY75, Infantry Reference Data Volume I.
7. Department of the Army, TOE 17-235 S600 (Proposed series), Tank Battalion XM-1.
8. Department of the Army, TOE 07-245 S600 (Proposed series), Infantry Battalion (Mechanized) (Division 86).
9. Headquarters TRADOC Combined Arms Test Activity, TCATA Test Report FT 3826, Ammunition Transfer Point (ATP), September 1978.
10. Headquarters TRADOC Combined Arms Test Activity, TCATA Test Report No. FM 366, Lift Capability of the Ordnance Company Ammunition, Conventional DS/GS TOE 9-38H, Cpt. Carl F. Raab IV, 20 July 1976.
11. Jet Propulsion Laboratory, Publication 77-24 Revision 1, Software Design and Documentation Language, by Henry Kline, National Aeronautics and Space Administration, Jet Propulsion Laboratory, California Institute of Technology, Pasadena California, 1 August 1979.
12. Kiviat, P.J., Villanueva, R. and Markowitz, H.M., SIMSCRIPT II.5 Programming Language, 2nd Edition, Consolidated Analysis Centers, Inc. 1973.

13. Naval Postgraduate School Technical Report NPS 55-79-023, Tactical Parameters and Input Requirements for the Ground Component of the STAR Combat Model, by S.H. Parry and E.P. Kelleher, Jr., October 1979.
14. Naval Postgraduate School Technical Report, Ground Movement for the STAR Combat Model, by J.K. Hartman, to be published.
15. U.S. Army Human Engineering Laboratory Technical Memorandum 14-77, Tank Rearm Time Motion Study, by Hayden A. Scheetz and Dewitt R. Hoeltzel, May 1977.
16. U.S. Army Missile Munitions Center and School Redstone Arsenal Al., Munitions Systems Support Structure (MS-3) Volumes I, II, III, Draft, October 1976.
17. Wallace, W.S. and Hagewood, E.G., Simulation of Tactical Alternative Responses (STAR), M.S. Thesis, Naval Postgraduate School, Monterey, December 1978.

INITIAL DISTRIBUTION LIST

	No. Copies
1. Defense Technical Information Center Cameron Station Alexandria, Virginia 22314	2
2. Library, Code 0142 Naval Postgraduate School Monterey, California 93940	2
3. Department Chairman, Code 55 Department of Operations Research Naval Postgraduate School Monterey, California 93940	1
4. Professor James K. Hartman, Code 55Hh Department of Operations Research Naval Postgraduate School Monterey, California 93940	10
5. Professor S. H. Parry, Code 55Py Department of Operations Research Naval Postgraduate School Monterey, California 93940	10
6. LTC Edward P. Kelleher, Code 55Ka Department of Operations Research Naval Postgraduate School Monterey, California 93940	10
7. Professor Arthur L. Schoenstadt, Code 53Zh Department of Mathematics Naval Postgraduate School Monterey, California 93940	1
8. Office of the Commanding General U.S. Army TRADOC Attn: General Donn A. Starry Ft. Monroe, Virginia 23651	1
9. Headquarters U.S. Army Training & Doctrine Command Attn: ATCG-T (Col. Ed Scribner) Ft. Monroe, Virginia 23651	1

10. Headquarters 1
U.S. Army Training & Doctrine Command
Attn: Director, Analysis Directorate
Combat Developments (MAJ Chris Needels)
Ft. Monroe, Virginia 23651
11. Headquarters 1
U.S. Army Trainign & Doctrine Command
Attn: Director, Maneuver Directorate
Comabt Developments (Col. Fred Franks)
Ft. Monroe, Virginia 23651
12. Mr. David Hardison 1
Deputy Under Secretary of the Army
(Operations Research)
Department of the Army, The Pentagon
Washinton, D.C. 20310
13. LTG William Richardson 1
Commanding General
U.S. Army Combined Arms Center
Ft. Leavenworth, Kansas 66027
14. Director 1
Combined Arms Combat Development Activity
Attn: Col. Reed
Ft. Leavenworth, Kansas 66027
15. Director, BSSD 1
Combined Arms Training Development Activity
Attn: ATZLCA-DS
Ft. Leavenworth, Kansas 66027
16. Director 1
Combat Analysis Office
Attn: Mr. Kent Pickett
U.S. Army Combined Arms Center
Ft. Leavenworth, Kansas 66027
17. Command and General Staff College 1
Attn: Education Advisor
Room 123, Bell Hall
Ft. Leavenworth, Kansas 66027
18. Dr. Wilbur Payne, Director 1
U.S. Army TRADOC Systems Analysis Activity
White Sands Missile Range, New Mexico 88002

19. Headquarters, Department of the Army 1
Office of the Deputy Chief of Staff
for Operations and Plans
Attn: DAMO-2D
Washington, D.C. 20310
20. Commander 1
U.S. Army Concepts Analysis Agency
8120 Woodmont Avenue
Attn: MOCA-SMS (CPT Steve Shupack)
Bethesda, Maryland 20014
21. Commander 1
U.S. Army Concepts Analysis Agency
Attn: LTC Earl Darden-MOCA-WG
8120 Woodmont Avenue
Bethesda, MD. 20014
22. Director 1
U.S. Army Night Vision & Elctro-optical
Lab.
Attn: DEL-NV-VI-Mr. Bob Hermes
Fort Belvoir, VA 22060
23. Director 1
U.S. Army Material Systems Analysis
Activity
Attn: Mr. Will Brooks
Aberdeen Proving Grounds, Maryland 21005
24. Director 1
Combat Developments Experimentation
Command
Attn: CPT William J. Caldwell
Fort Ord, California 93941
25. Director 1
Armored Combat Vehicle Technology Program
Attn: Col. Fitzmorris
U.S. Army Armor Center
Ft. Knox, Kentucky 40121
26. Col. Frank Day 1
TRADOC systems Manager - XM1
U.S. Army Armor Center
Ft. Knox, Kentucky 40121
27. Director 1
Comabt Developments, Studies Division
Attn: MAJ W. Scott Wallace
U.S. Army Armor Agency
Fort Knox, KY 40121

28. Commandant 1
U.S. Army Field Artillery School
Attn: ATSF-MBT (CPT Steve Starner)
Fort Sill, Oklahoma 73503
29. Director 1
Combat Developments
Attn: Col. Clark Burnett
U.S. Army Aviation Agency
Fort Rucker, Alabama 36362
30. Director 1
Combat Developments
U.S. Army Infantry Agency
Fort Benning, GA 31905
31. CDR. MICOM 1
ATTN: DRSMI-YC (CPT. HAGEWOOD)
Redstone Arsenal, AL 35809
32. Director 1
Combat Developments
ATTN: CPT William D. Meiers
U.S. Army Air Defense Agency
Fort Bliss, TX 79905
33. Commander 1
U.S. Army Logistics Center
ATTN: ATCL-OS-Mr. Cammeron/CPT Schuessler
Fort Lee, VA 23801
34. Commander, USAMMCS 1
ATTN: ATSK-CD-CS-Mr. Lee/Mr. Marmon
Redstone Arsenal, AL 35809
35. Commander 1
U.S. Army Combined Arms Center
ATTN: ATZL-CA-CAT (R.E. DeKinder, Jr.)
Fort Leavenworth, KA 66027
36. Director 1
U.S. Army AMSAA
ATTN: DRXS-YY-AA (Mr. Tom Coyle)
Aberdeen Proving Grounds, MD 21005
37. R. Stampfel, Code 55 1
Department of Operations Research
Naval Postgraduate School
Monterey, California 93940

- | | | |
|-----|--|---|
| 38. | Cpt. Donald G. Kirby
384-A Bergin Drive
Monterey, CA 93940 | 2 |
| 39. | MAJ. Douglas P. Schultz
1004 Leahy Rd.
Monterey, CA 93940 | 2 |

Thesis
K
493 K
c.1

Thesis
K493
c.1

Kirby

A high resolution
integrated combat and
logistics model (STAR-
LOG).
29999
JAN 31 1966

188890

Thesis
K493
c.1


Kirby

A high resolution
integrated combat and
logistics model (STAR-
LOG).

188890

thesK493

A high resolution integrated combat and



3 2768 002 10901 9

DUDLEY KNOX LIBRARY